

## Characterization of Fault Roughness at Various Scales: Implications of Three-Dimensional High Resolution Topography Measurements

THIBAUT CANDELA,<sup>1</sup> FRANÇOIS RENARD,<sup>1,2</sup> MICHEL BOUCHON,<sup>3</sup> ALEXANDRE BROUSTE,<sup>4</sup>  
DAVID MARSAN,<sup>5</sup> JEAN SCHMITTBUHL,<sup>6</sup> and CHRISTOPHE VOISIN<sup>3</sup>

*Abstract*—Accurate description of the topography of active fault surfaces represents an important geophysical issue because this topography is strongly related to the stress distribution along fault planes, and therefore to processes implicated in earthquake nucleation, propagation, and arrest. To date, due to technical limitations, studies of natural fault roughness either performed using laboratory or field profilometers, were obtained mainly from 1-D profiles. With the recent development of Light Detection And Ranging (LIDAR) apparatus, it is now possible to measure accurately the 3-D topography of rough surfaces with a comparable resolution in all directions, both at field and laboratory scales. In the present study, we have investigated the scaling properties including possible anisotropy properties of several outcrops of two natural fault surfaces (Vuache strike-slip fault, France, and Magnola normal fault, Italy) in limestones. At the field scale, digital elevation models of the fault roughness were obtained over surfaces of 0.25 m<sup>2</sup> to 600 m<sup>2</sup> with a height resolution ranging from 0.5 mm to 20 mm. At the laboratory scale, the 3-D geometry was measured on two slip planes, using a laser profilometer with a spatial resolution of 20 μm and a height resolution less than 1 μm.

Several signal processing tools exist for analyzing the statistical properties of rough surfaces with self-affine properties. Among them we used six signal processing techniques: (i) the root-mean-squares correlation (RMS), (ii) the maximum-minimum height difference (MM), (iii) the correlation function (COR), (iv) the RMS correlation function (RMS-COR), (v) the Fourier power spectrum (FPS), and (vi) the wavelet power spectrum (WPS). To investigate quantitatively the reliability and accuracy of the different statistical methods, synthetic self-affine surfaces were generated with azimuthal variation of the scaling exponent, similar to that which is observed for natural fault surfaces. The accuracy of the signal processing techniques is assessed in terms of the difference between the “input” self-affine exponent used for the synthetic construction and the “output” exponent recovered by those different methods. Two kinds of biases have been identified: Artifacts inherent to data acquisition and intrinsic errors of the methods themselves. In the latter case, the statistical results of our parametric study provide a quantitative estimate of the dependence of the accuracy with system size and directional morphological anisotropy. Finally, based on this parametric study, we used the most reliable

---

<sup>1</sup> Laboratoire de Géodynamique des Chaînes Alpines, CNRS-OSUG, University Joseph Fourier - Grenoble I, BP 53, 38041 Grenoble, France. E-mail: Thibault.Candela@bvra.e.ujf-grenoble.fr; francois.renard@ujf-grenoble.fr

<sup>2</sup> Physics of Geological Processes, University of Oslo, Oslo, Norway.

<sup>3</sup> Laboratoire de Géophysique Interne et Tectonophysique, CNRS-OSUG, University Joseph Fourier - Grenoble I, Grenoble, France.

<sup>4</sup> Laboratoire Manceau de Mathématiques, CNRS, Université of Le Mans, Université du Maine, Le Mans, France. E-mail: Alexandre.Brouste@univ-lemans.fr

<sup>5</sup> Laboratoire de Géophysique Interne et Tectonophysique, CNRS, University of Savoie, Le Bourget du Lac, France. E-mail: david.marsan@univ-savoie.fr

<sup>6</sup> UMR 7516, Institut de Physique du Globe de Strasbourg, Strasbourg, France.

techniques (RMS-COR, FPS, WPS) to analyze field data. These three methods provide complementary results. The FPS and WPS methods determine a robust characterization of the fault surface roughness in the direction of striations and perpendicular to them. The RMS-COR method allows investigation of the azimuth dependence of the scaling exponent. For both field and laboratory data, the topography perpendicular to the slip direction displays a similar scaling exponent  $H_{\perp} = 0.8$ . However, our analysis indicates that for the Magnola fault surface the scaling roughness exponent parallel to the mechanical striation is identical at large and small scales  $H_{\parallel} = 0.6\text{--}0.7$ , whereas for the Vuache fault surface it is characterized by two different self-affine regimes at small and large scales. We interpret this cross-over length scale as a witness of different mechanical processes responsible for the creation of fault topography at different spatial scales.

**Key words:** Fault, 3-D laser scanner, fault-surface roughness, self-affine surface, roughness exponent.

## 1. Introduction

Knowledge of the detailed fault geometry is essential to understand certain major processes involved in faulting such as grain comminution or asperities abrasion during slip, geometrical heterogeneity of the stress field that controls earthquake nucleation (CAMPILLO *et al.*, 2001; VOISIN *et al.*, 2002a), rupture propagation, and arrest (VOISIN *et al.*, 2002b). Establishing correlations between geometrical properties of fault roughness (POWER *et al.*, 1987, 1988; POWER and TULLIS, 1991; SCHMITTBUHL *et al.*, 1993; LEE and BRUHN, 1996; POWER and DURHAM, 1997; RENARD *et al.*, 2006; SAGY *et al.*, 2007), seismic behavior of faults (OKUBO and AKI, 1987; PARSON, 2008), frictional strength and critical slip distance (SCHOLZ, 2002), wear processes during fault zone evolution (POWER *et al.*, 1988) represent a fundamental issue to understand seismic faulting.

At the laboratory scale, AMITRANO and SCHMITTBUHL (2002) highlight a complex coupling between fault gouge generation and fault roughness development. At larger scale, asperities control the slip distribution of earthquake (PEYRAT *et al.*, 2004). Indeed asperities on active fault planes concentrate the stress (MARSAN, 2006; SCHMITTBUHL *et al.*, 2006) and therefore may control earthquake nucleation (LAY *et al.*, 1982; SCHOLZ, 2002) and the propagation of the rupture to its ultimate arrest (AKI, 1984). High resolution relocations of earthquakes using the multiplet technique have shown streaks of earthquake along several faults in California (RUBIN *et al.*, 1999). This pattern has been interpreted as resulting from the presence of an organized large scale roughness (asperities) resisting slip (SCHAFF *et al.*, 2002).

Despite recent progress in seismology, the imaging of fault planes over a large range of scales at depth is not yet available. A quasi-unique access to high resolution description of the fault plane comes from exhumed fault scarp observations. This requires, of course, that the main morphological patterns of faults mapped at the surface of the Earth persist at least across the seismogenic zone. Due to technical limitations, prior comparative studies of natural fault roughness were mainly based on 1-D profilometry (POWER *et al.*, 1987, 1988; POWER and TULLIS, 1991; SCHMITTBUHL *et al.*, 1993; LEE and BRUHN, 1996; POWER and DURHAM, 1997). These 1-D measurements have shown that fault roughness can be characterized by a scale invariance property described

by a self-affine geometry (see Section 2 for the definition of self-affinity) with a roughness scaling exponent close to 0.8 for profiles oriented in a direction perpendicular to the striations observed on the fault plane. Such striations are aligned in the direction of slip. The value of 0.8 is similar to what was measured for tensile cracks (POWER *et al.*, 1987; SCHMITTBUHL *et al.*, 1995b; BOUCHAUD, 1997). Moreover, the influence of slip was also quantified: The fault surfaces have smaller roughness amplitude along the slip direction than perpendicular to it (POWER *et al.*, 1988; POWER and TULLIS, 1991; LEE and BRUHN, 1996; POWER and DURHAM, 1997). The compiled fault roughness statistics of several studies (POWER and TULLIS, 1991; LEE and BRUHN, 1996; BEN-ZION and SAMMIS, 2003) suggest a change in scaling properties between large and short length scales. However, considering the noise in their data, these authors underlined that it was not possible to decipher whether this variation was related to small-scale surface weathering of the fault scarp or to the faulting process itself.

With the recent development of high resolution distance meters, it is now possible to use accurate statistical approaches to quantify fault roughness. Indeed, portable 3-D laser scanners (also called LiDAR, Light Detection And Ranging) allow mapping fault surface outcrops over scales of 0.5 mm to several tens of meters. The accuracy of the measurements enables a reliable quantification of the data. RENARD *et al.* (2006) and SAGY *et al.* (2007) demonstrated precisely the scaling invariance and anisotropy properties of fault topography using ground based LIDAR and laboratory profilometers. In these previous studies, statistical analysis of fault roughness was carried out with a single signal processing tool. However, SCHMITTBUHL *et al.* (1995a,b) recommend the simultaneous use of different methods in order to appreciate the confidence in the measured scaling invariance properties.

In the present study, we use new roughness data to extend the type of measurements made by RENARD *et al.* (2006) and SAGY *et al.* (2007) and propose a parametric study of the statistical results of fault topography, using multiple signal processing tools. In order to investigate the reliability and accuracy of the different signal processing methods, synthetic self-affine surfaces were generated with azimuthal variation of the scaling exponent. These synthetic rough surfaces are completely characterized by two different self-affine exponents prescribed in perpendicular directions. When comparing these synthetic surfaces to natural faults, one should keep in mind that any self-affine model can only describe a real surface to a finite degree of accuracy, and only within a finite range of scales. After this systematic study, we used the most reliable and accurate techniques to investigate the scaling properties and anisotropy of several outcrops of two natural fault surfaces that have been measured using 3-D laser scanners in the field and a laser profilometer in the laboratory.

This paper is organized as follows. In Section 2, following a brief explanatory discussion of the self-affine notion, the generation process of synthetic self-affine surfaces with a directional morphological anisotropy is described. In Section 3, statistical methods to define the self-affine properties are reviewed. Section 4 is devoted to the systematic study of the accuracy of the methods. Section 5 is devoted to the acquisition of data on natural fault. In Section 6, analysis of the roughness, covering six orders of

magnitude of length scales, is performed on several outcrops of two natural faults. Finally, in Section 7, we conclude by linking our findings on the statistical properties of natural fault topography to the results of earlier studies, with the ultimate goal of developing a more mutually consistent description of fault asperities geometry.

## 2. Generation of Self-affine Surfaces

### 2.1. Self-affinity in 1-D and 2-D

Surface roughness analysis provides a statistical characterization of a surface which is simpler and easier to use than a complete deterministic description. In geophysics, BROWN and SCHOLZ (1985) and POWER *et al.* (1987) demonstrated the self-similar property of natural fault surfaces at field scale. Coming from statistical physics, a more general scaling transformation has been proposed: self-affinity (MANDELBROT, 1985, 1986; VOSS, 1985) that was successfully used for the quantitative description of fault roughness (SCHMITTBUHL *et al.*, 1993, RENARD *et al.*, 2006).

A self-affine 1-D profile remains unchanged under the scaling transformation  $\delta x \rightarrow \lambda \delta x$ ,  $\delta z \rightarrow \lambda^H \delta z$  for 1-D profiles (Fig. 1) extracted from a surface (MEAKIN, 1998). Here,  $\delta x$  is the coordinate along the profile and  $\delta z$  is the roughness amplitude. For a self-affine profile, the scaling exponent  $H$ , also called Hurst exponent, lies in the range  $0 \leq H < 1$ . Accordingly, self-affinity implies that a profile appears less rough as the scale increases. In other words, if a profile is self-affine, a magnified portion of it will appear statistically identical to the entire profile if different magnifications are used in the  $x$  and  $z$  directions (Fig. 1).

For 2-D surfaces, this self-affinity property can be described for sets of 1-D parallel profiles extracted from the surface. Moreover, if the surface is striated along some given orientation, anisotropic scaling behavior can emerge if  $H$  varies for different directions in the plane of the surface. An anisotropic self-affine surface  $Z(x, y)$  with coordinates  $(x, y)$  obeys the property:  $Z(\lambda^{1/H_{//}}x, \lambda^{1/H_{\perp}}y) = \lambda Z(x, y)$ , where  $\lambda$  is a positive dilation factor,  $H_{//}$  and  $H_{\perp}$  are the Hurst exponents, comprised between 0 and 1, in two perpendicular directions of the surface.  $H_{//}$  is defined along a direction parallel to the main striations, and  $H_{\perp}$  is defined along a direction perpendicular to the striation (Fig. 1b).

### 2.2. Synthetic Anisotropic Self-affine Surfaces

To calculate synthetic fault surfaces (Fig. 1b), we used a Fourier based method to simulate a matrix scaling random Gaussian field on a 2-D grid, where an anisotropy matrix  $E = \begin{pmatrix} 1/H_{//} & 0 \\ 0 & 1/H_{\perp} \end{pmatrix}$  was introduced when calculating the 2-D Gaussian random field. The eigenvalues of this matrix correspond to the inverse of the two roughness exponents  $H_{//}$ , and  $H_{\perp}$  that characterize the self-affine properties of the

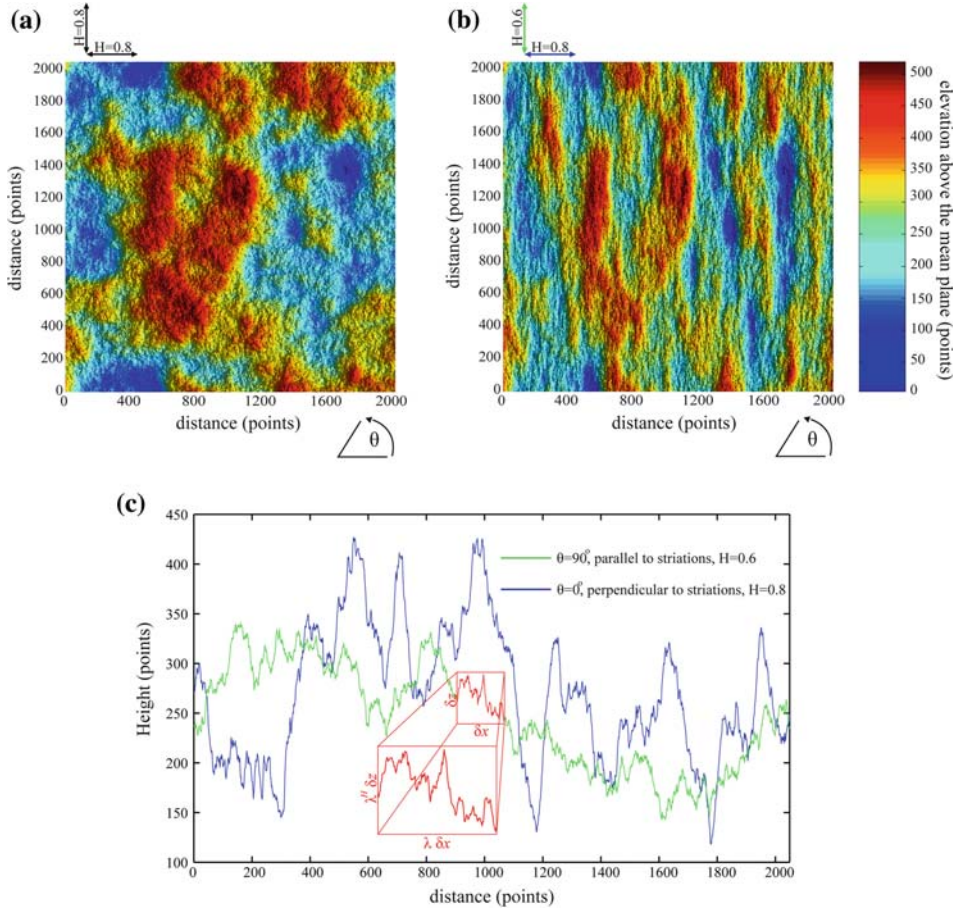


Figure 1

Digital Elevation Models (DEM) of 2D synthetic self-affine surfaces (up) and 1-D profiles (down) generated using the algorithm of the appendix. (a) Surface with an isotropic self-affine property characterized by a Hurst exponent of 0.8. (b) Anisotropic self-affine surface with two Hurst exponents ( $H_{\parallel} = 0.6$  and  $H_{\perp} = 0.8$ ) in perpendicular directions. (c) Representative 1-D profiles extracted in two perpendicular directions of surface (b). Inset: magnified portion of a profile along the  $H_{\parallel}$  direction (parallel to the striations), which has a statistically similar appearance to the entire profile when using a rescaling  $\delta x \rightarrow \lambda \delta x$ ,  $\delta z \rightarrow \lambda^H \delta z$ .

generated surface in two perpendicular directions (BIERME *et al.* 2007; CLAUSEL and VEDEL, 2008). The code to generate an anisotropic 2-D self-affine surface, written in Matlab®, is given in Appendix A and can be run easily on a desktop computer.

In the following sections, we decompose the signal processing analysis of rough surfaces in two stages. Firstly, we present the six signal processing tools used to estimate the self-affine property of an isotropic surface with a single Hurst exponent (Fig. 1a), as observed for example for fresh mode I brittle fractures in rocks (POWER *et al.*, 1987;

SCHMITTBUHL *et al.*, 1995b; BOUCHAUD, 1997). For this, we have synthesized several isotropic surfaces with an exponent in the range [0.1–0.9] and grid sizes in geometrical series:  $129 \times 129$  points,  $513 \times 513$  points,  $2049 \times 2049$  points. Secondly, we analyze synthetic anisotropic surfaces (Fig. 1b) with  $H_{//}$  in the range [0.7–0.9] and  $H_{\perp}$  in the range [0.4–0.9].

### 3. Statistical Signal Processing Methods

We have used six different methods that characterize the amplitude of the roughness at various spatial wavelengths. All these methods, presented in the following subsections, are based on the analysis of 1-D profiles (Fig. 1c) that are extracted from the 2-D Digital Elevation Model (DEM) of 2-D surfaces (Fig. 1a, b). For each surface, a set of 1-D parallel profiles in a specific direction are extracted, detrended and then analyzed. Then, the properties are averaged over all the 1-D profiles to characterize the 2-D surface in the chosen direction. To study the azimuthal dependence of the statistical properties of the surfaces, we have extracted profiles in several directions, following a  $360^{\circ}$  rotation. Estimating the statistical properties of the surface in various directions (RENARD *et al.*, 2006) allows characterizing a morphological anisotropy.

For the application to natural fault surfaces, we also tested how the noise in the data and the presence of missing points could affect the estimation of fault surface. Indeed, the raw scanner data consist of clouds of points, with  $x$ ,  $y$ , and  $z$  coordinates, sampled more or less regularly. Sometimes, data are missing (vegetation on the fault plane, low reflectivity of the scanner light beam), and the surface is incomplete. An interpolation is then necessary, which induces a bias in the estimation of scaling exponents that also need to be estimated.

#### 3.1. Root-mean-squares Correlation (RMS) and Maximum-minimum Height Difference (MM) Methods

Consider a 1-D profile  $L(x)$  that is divided into windows of width  $\delta x$  and indexed by the position of the first point  $x_0$  of the band. The standard deviation  $\sigma(\delta x)$  of the height  $L(x)$  and the height difference  $h(\delta x)$  between the maximum and minimum height are computed for each band, and then averaged over all the possible bands of fixed width  $\delta x$  spanning the profile, by varying the origin  $x_0$ . We then obtain  $\langle \sigma(\delta x) \rangle$  and  $\langle h(\delta x) \rangle$ , where both quantities follow a power law for a self-affine profile:  $\langle \sigma(\delta x) \rangle \propto \delta x^H$  and  $\langle h(\delta x) \rangle \propto \delta x^H$  (SCHMITTBUHL *et al.* 1995a).

Note that this technique is useful when  $H$  is not too close to 0 or 1, where a significant error can be measured (see Figs. 3a, b – 4a, b). Usually, levelling off of  $\sigma(\delta x)$  at small  $\delta x$  values is due to the noise in the data (see Figs. 7c, d), and leveling-off at large  $\delta x$  is due to the finite size of the profile.

### 3.2. Height-height Correlation Function (COR) Method

For a signal  $L(x)$ , we consider the height-height correlation function defined by  $C(\Delta x) = \left[ \left\langle (L(x) - L(x + \Delta x))^2 \right\rangle \right]^{1/2}$ , which estimates the average height-height difference between two points of the profile separated by a distance  $\Delta x$ . For a self-affine profile, the correlation function follows a powerlaw such that  $C(\Delta x) \propto \Delta x^H$  where  $H$  is the Hurst exponent.

### 3.3. Standard Deviation of the Correlation Function (RMS-COR) Method

For a profile  $L(x)$  containing  $N$  points, the height difference  $\Delta L$  between each pair of points separated by a distance  $\Delta x$  is calculated. The window size  $\Delta x$  is varied between the sampling distance and the size of the system and, for a given  $\Delta x$ , the standard deviation of the height difference  $\sigma(\Delta L_{\Delta x})$  is calculated. For a self-affine surface this measurement follows a powerlaw such that  $\sigma(\Delta x) \propto \Delta x^H$ . This method was successfully applied to characterize the self-affine properties of the Vuache fault plane (RENARD *et al.* 2006).

### 3.4. Fourier Power Spectrum (FPS) Method

The Hurst exponent  $H$  can be estimated from the Fourier power spectrum which has a power law form for a 1-D self-affine profile (BARABASI and STANLEY, 1995; MEAKIN, 1998). For each parallel profile, the Fourier power spectrum  $P(k)$ , *i.e.*, the square of the modulus of the Fourier transform, is calculated as a function of the wavenumber  $k$ . Then the spectrum of the entire surface is calculated by stacking all 1-D Fourier transforms to reduce the noise associated with individual profiles. For each profile of length  $L$  containing  $N$  increments, the spatial frequencies range between  $1/L$  and the Nyquist frequency  $N/2L$  (*i.e.*, the reciprocal of the interval between data points). When plotting the power spectrum as a function of  $k$  in log-log space, a self-affine function reveals a linear slope, which is itself a function of the Hurst exponent  $H$  through  $P(k) \propto k^{-1-2H}$ .

### 3.5. Average Wavelet Coefficient Power Spectrum (WPS) Method

The average wavelet coefficient method consists of decomposing the input signal into amplitudes that depend on position and scale. The wavelet transform of each 1-D profile  $L(x)$  is defined as  $W_{a,b} = \frac{1}{\sqrt{a}} \int_{-\infty}^{+\infty} \psi\left(\frac{x-b}{a}\right) |L(x)| dx$  where  $\psi$  is the wavelet function. Then the wavelet coefficients are averaged over the translation factor  $b$  for each length scale  $a$ :  $W_a = \langle W_{a,b} \rangle_b$ . If the profile is self-affine, the wavelet transform verifies statistically that, for any positive dilatation factor  $\lambda$ ,  $W_{a,b}[L(\lambda x)] = \lambda^H W_{a,b}$ . Accordingly, the averaged wavelet coefficients scale as  $W_a \propto a^{H+1/2}$ . A wide range of wavelet functions can be used. For a simple and efficient implementation, we chose the Daubechies wavelet of order 12 as suggested in SIMONSEN *et al.* (1998).

#### 4. Quantitative Estimation of the Accuracy of Roughness Analysis Methods

##### 4.1. Synthetic Isotropic and Anisotropic Rough Surfaces

Figures 1a and 1b display the topography of synthetic rough surfaces where the data set includes  $2049 \times 2049$  points regularly spaced on a grid. Figure 1a shows an isotropic rough surface, whereas Figure 1b shows an anisotropic surface, with corrugations elongated parallel to the direction of smaller Hurst exponent (analogue to the direction of slip on a natural fault surface) and covering a wide range of scales.

The roughness amplitude of a profile parallel to the striation direction (green curve in Fig. 1c) is smaller than that of a perpendicular profile. The profile extracted along the direction with the smallest exponent (green curve) appears more jagged at small scales compared to a perpendicular profile, showing the different effects of the anisotropy of the surface on the waviness and amplitude of the profiles.

The outputs of the statistical methods described in Section 2.3 are represented on Figure 2. Each curve is calculated by averaging the outputs of all possible parallel 1-D profiles extracted from the anisotropic surface of Figure 1b. The results are represented in a log-log plot, allowing visualization of the linear portion of the curve that characterizes a power-law distribution (Fig. 2). This linear portion is binned in a small number of increments, and a power-law fit is performed to extract the Hurst exponent that characterizes the self-affinity of the profile. The best fits are performed for each curve and a value of the “output” self-affine exponent is then calculated for all the six signal processing methods.

Using the RMS correlation function, we have also extracted sets of parallel profiles in several directions, at an angle  $\theta$  to the direction of the striations. For each set of profile, we have calculated the correlation function and estimated the value of  $H$ . The angular dependence of  $H$  could be represented on a polar plot (inset in Fig. 2d) (RENARD *et al.*, 2006). The anisotropy of such plot characterizes the anisotropy of the surface: An isotropic surface is represented as a circle of radius  $H$ , whereas an anisotropic one has a more complex elliptical shape.

##### 4.2. Isotropic Surfaces: Effect of Size and Input Exponent on the Output Estimation of the Hurst Exponent

The comparison between the input Hurst exponent used to calculate an isotropic synthetic surface and the output Hurst exponent estimated using the six different methods is represented on Figure 3, for different system sizes. The RMS, MM, COR and RMS-COR methods are all mainly sensitive to the value of the input self-affine exponent (the typical trend of the curve is not parallel to the diagonal). Small self-affine exponents are systematically overestimated whereas large exponents are underestimated. In contrast, the error for the WPS method is mainly a function of the system size (the response is more or less parallel to the diagonal). The FPS method appears the most accurate

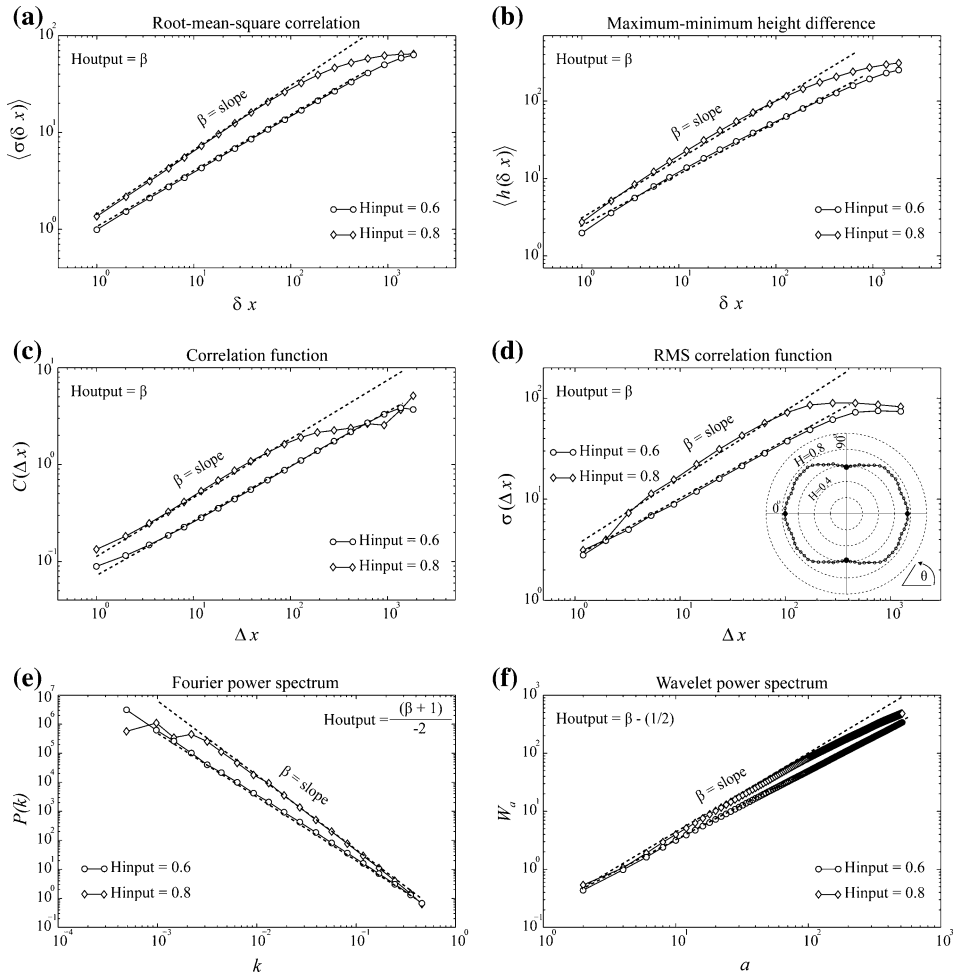


Figure 2

Outputs of the six signal processing techniques applied to the data of the anisotropic self-affine surface shown in Figure 1b. (a) Root-mean-squares correlation (RMS), (b) maximum-minimum height difference (MM), (c) correlation function (COR), (d) RMS correlation function (RMS-COR), (e) Fourier power spectrum (FPS), (f) Wavelet power spectrum (WPS). The dashed lines represent fits of the curves to obtain the output  $\beta$ . The inset in (d) displays a polar plot of  $H$  obtained by the RMS-COR method and allowing then to determine the azimuth dependence of  $H$ . The black points correspond to the Hurst exponents for the two profiles shown on this plot.

technique, with only slight sensitivity to the input self-affine exponent and size effects. This conclusion should however be interpreted cautiously as the algorithm used to generate the synthetic surface is based on a Fourier transform approach. The conclusion of this comparison test is that the FPS, WPS, and RMS-COR methods are the most reliable because they have a small dependence on the value of the input Hurst exponent and a slight dependence on system size.

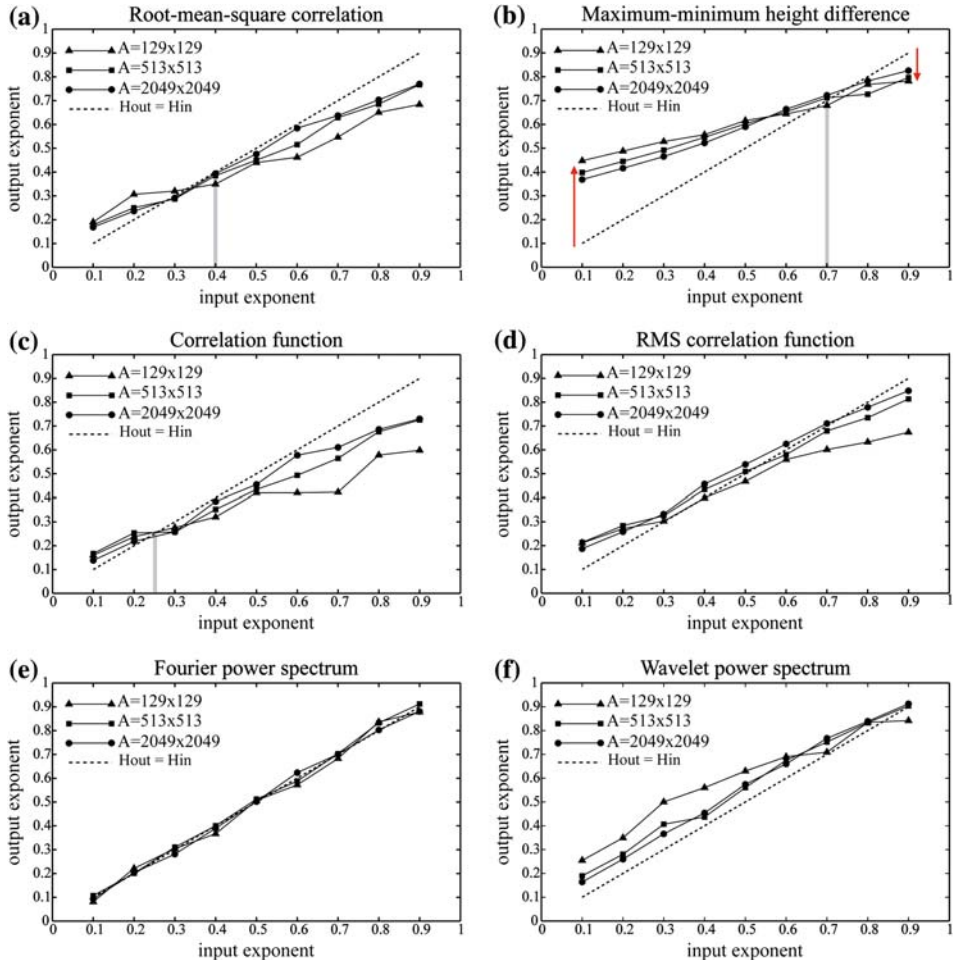


Figure 3

Comparisons between the “input” Hurst exponents introduced in the construction of isotropic fractional Brownian surfaces and the “output” exponent measured on these surfaces using the six independent signal processing techniques. The three outputs illustrate effects of system size. (a) Root-mean-squares correlation (RMS), (b) maximum-minimum height difference (MM), (c) correlation function (COR), (d) RMS correlation function (RMS-COR), (e) Fourier power spectrum (FPS), (f) Wavelet power spectrum (WPS). The gray line in (a), (b), and (c) indicates for which input exponent the error in the estimation is closest to zero.

#### 4.3. Anisotropic Surfaces: Interaction between the Two Input Roughness Exponents

For synthetic self-affine anisotropic surfaces, we have calculated the error on the estimation of the two Hurst exponents. For this, we have built surfaces ( $2049 \times 2049$  points, similar to Fig. 1b) for which the Hurst exponents  $H_{input//}$  and  $H_{input\perp}$  in two perpendicular directions were varied in the range  $[0.4-0.9]$ . We have then used the six signal processing techniques to estimate the values of these same exponents. The absolute

error in the estimation of each Hurst exponent (Fig. 4) depends on the input value of these parameters and also on the amplitude of their difference ( $H_{\text{input}\parallel} - H_{\text{input}\perp}$ ).

This error is particularly large for the RMS (up to 20%), MM (up to 25%), and COR (up to 35%) methods. When the input anisotropy ( $H_{\text{input}\parallel} - H_{\text{input}\perp}$ ) increases, the absolute error on the two output exponents increases accordingly. The absolute error is smaller in the direction of the smallest exponent (analogue to the direction of striation on a natural fault surface) than perpendicular to it. Moreover, it is also noteworthy to mention that these three techniques show significant errors in the estimation for input exponents close to 0.8–0.9 even if the anisotropy is minimal, demonstrating the limited reliability of these methods to detect an exponent close to one.

The RMS-COR analysis is also sensitive to the input anisotropy (Fig. 4d), however such an effect is not strongly pronounced (the absolute errors are smaller, up to 15%). For this method, the error does not depend on the values of the two input Hurst exponents. For example, with a synthetic surface defined by  $H_{\text{input}\parallel} = 0.8$  and  $H_{\text{input}\perp} = 0.6$ , the absolute error in the estimation of each Hurst exponent is almost identical. As shown in Figure 4d, when anisotropy is small, the errors do not increase significantly for input values close to 1 unlike the three previous methods.

The FPS and WPS analyses are only slightly sensitive to the “input” anisotropy and the estimated Hurst exponents do not depend on the input exponent values. Our analysis clearly shows that the FPS, the WPS and, to a lesser extent, the RMS-COR methods are the most reliable. More precisely, the RMS-COR and the WPS techniques slightly underestimate and overestimate, respectively, the roughness exponent compared to the FPS method.

We have also analyzed the azimuthal dependence of the Hurst exponent for synthetic anisotropic self-affine surfaces. Comparisons of the “output” anisotropy estimated using the RMS-COR method and the “input” anisotropy are represented on Figure 5. We have used this technique because it does not require interpolation of the profiles, whereas the FPS and WPS methods would need regularly spaced data points. A significant directional morphological anisotropy of surfaces is visible on these polar plots of  $H$  even if a low “input” anisotropy is imposed, thus demonstrating the reliability of the RMS-COR method to detect a slight morphological anisotropy. Remarkably, following a 360° rotation, the azimuth variation of  $H$  is not progressive. When departing a few degrees from the direction of the smallest “input” exponent, the “output” exponent is already very close to the largest “input” exponent. This property of anisotropic self-affine surface is not well understood yet.

A tentative way to calculate the error on the anisotropy that is made when estimating the anisotropy of the surface  $|H_{\parallel} - H_{\perp}|$  is represented in Figure 6. This plot indicates the error on the estimation of the anisotropy of the surface, and therefore provides some bounds on the accuracy of the determination of this property. Most methods underestimate the anisotropy, except the Fourier power spectrum which slightly overestimates it. For the RMS, MM, and COR methods, when the “input” anisotropy  $|H_{\parallel} - H_{\perp}|$  increases, the absolute error on the “output” anisotropy increases accordingly.

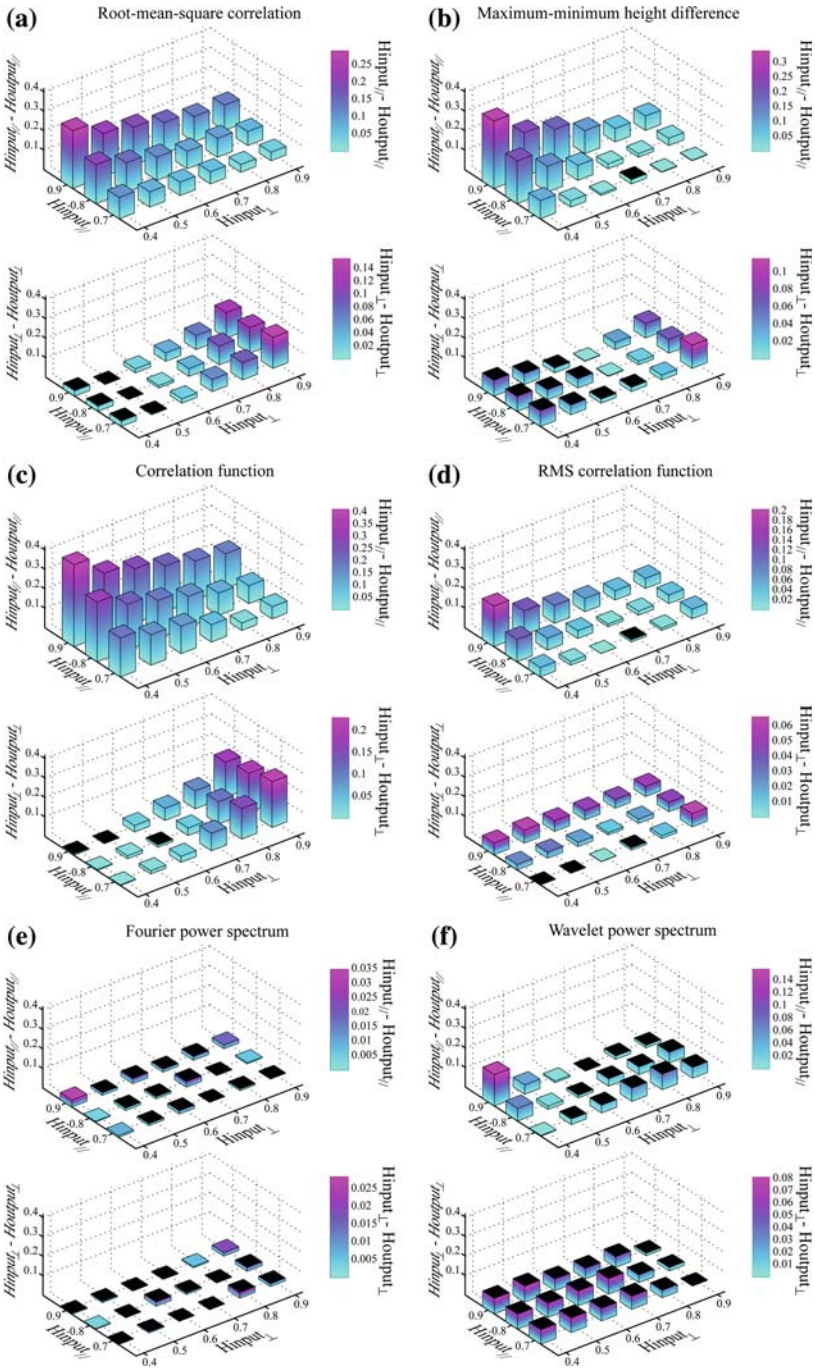


Figure 4

Intrinsic errors in the estimation of the Hurst exponents for anisotropic synthetic surfaces characterized by two Hurst exponents  $H_{input//}$  and  $H_{input\perp}$  in perpendicular directions ( $2049 \times 2049$  points, similar to Figure 1b). For each signal processing method, histogram plots are represented where the horizontal axes contain the Hurst exponents  $H_{input//}$  and  $H_{input\perp}$  used as inputs to generate the synthetic surface. The vertical axis represents the difference between the input exponent and the estimated output Hurst exponent, using the six different methods. For each method, two histogram plots are represented: the upper one shows the difference ( $H_{input//} - H_{output//}$ ) and the lower one the difference ( $H_{input\perp} - H_{output\perp}$ ). The black top surfaces on the histogram bars indicate a negative difference (overestimation of the output exponent) and the colored ones a positive difference (underestimation of the output exponent). (a) Root-mean-squares correlation (RMS), (b) maximum-minimum height difference (MM), (c) correlation function (COR), (d) RMS correlation function (RMS-COR), (e) Fourier power spectrum (FPS), (f) Wavelet power spectrum (WPS).

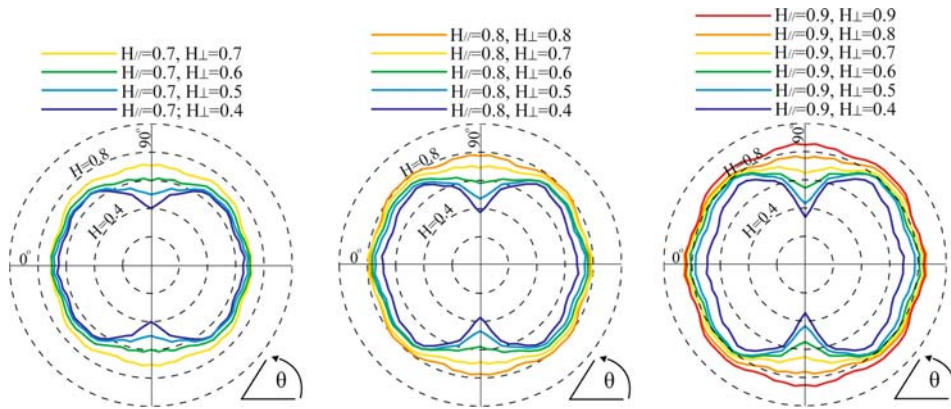


Figure 5

Polar plots of the angular dependence of the two Hurst exponents  $H_{//}$  and  $H_{\perp}$  for synthetic anisotropic surfaces with principal directions oriented at angles  $\theta_{//} = 0^\circ$  and  $\theta_{\perp} = 90^\circ$ . The Hurst exponents  $H_{//,\perp}(\theta)$ , as defined by the slope  $\beta = H$  in Figure 2d, were calculated on series of 1-D profiles extracted at an angle  $\theta$  on  $2049 \times 2049$  points surfaces. Three series of simulations are represented here for three values of  $H_{//}$  in the range [0.7–0.9]. For each polar plot, the different curves correspond to successive values of  $H_{\perp}$ . The dashed lines correspond to the values of the output Hurst exponent measured with the RMS correlation method (center dashed circle:  $H = 0.2$ , outer dashed circle:  $H = 1$ ).

Moreover, this absolute error is similar for all surfaces with the same “input” anisotropy, regardless of the values of the two “input” self-affine exponents.

The determination of the “output” anisotropy with the RMS-COR, FPS, and WPS methods is less sensitive to the “input” anisotropy, except for the highest anisotropy, thus demonstrating the robustness of these three methods to determine the azimuth dependence of the statistical properties of an anisotropic self-affine surface. More precisely, estimates reported for the WPS method are somehow systematically lower than those of the two other techniques.

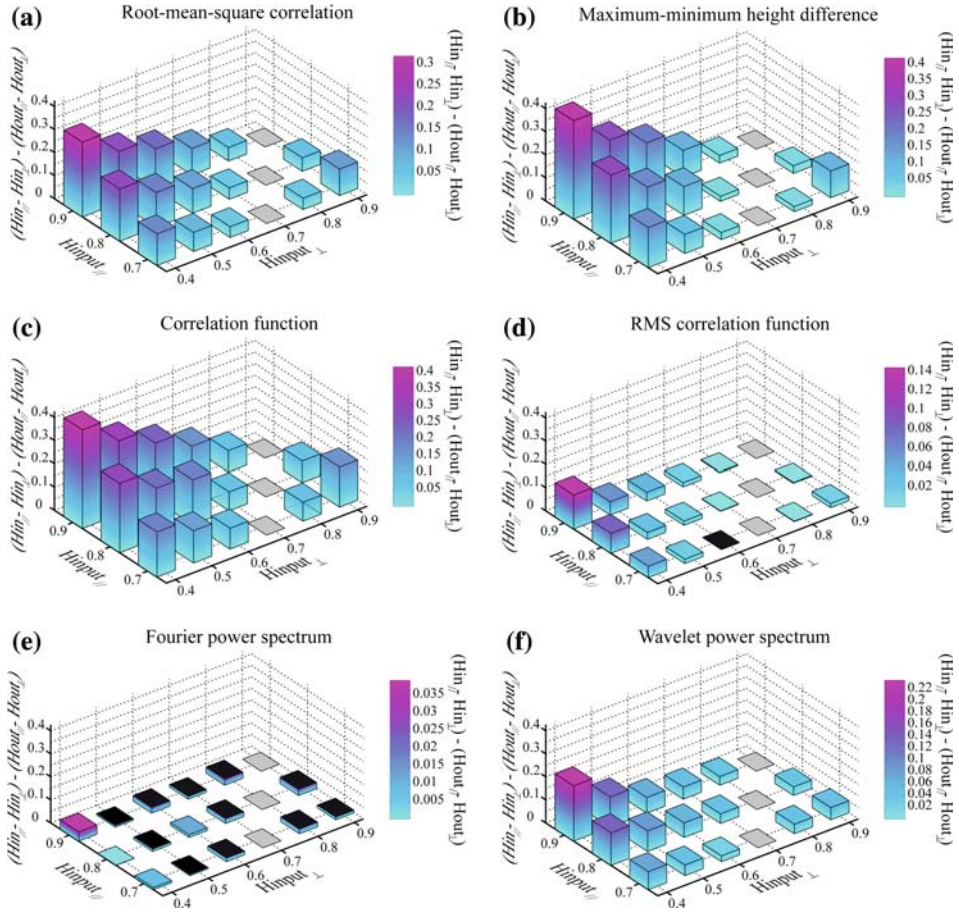


Figure 6

Quantification of the intrinsic errors on the estimation of the anisotropy of the surface ( $H_{\parallel} - H_{\perp}$ ). The difference between the “input” anisotropy (difference between the two “input” Hurst exponents) introduced in synthetic surfaces ( $2049 \times 2049$  points, similar to Fig. 1b), minus the “output” anisotropy is represented for the six signal processing methods: (a) Root-mean-squares correlation (RMS), (b) maximum-minimum height difference (MM), (c) correlation function (COR), (d) RMS correlation function (RMS-COR), (e) Fourier power spectrum (FPS), (f) wavelet power spectrum (WPS). Bars with black top surface indicate an overestimation (“input” anisotropy - “output” anisotropy < 0) and colored top surfaces indicate an underestimation (“input” anisotropy - “output” anisotropy > 0). Gray bars indicate isotropic surfaces ( $H_{\parallel} = H_{\perp}$ ), thus without errors.

#### 4.4. Effect of Noise

In all physical measurements, noise is present in the data because of the limited resolution of the measuring device. Such noise is usually described using Gaussian statistics with a zero mean and a constant variance. We have analyzed how the presence of noise in synthetic data could alter the estimation of the Hurst exponent. For this, we have calculated synthetic anisotropic surfaces and added a Gaussian noise with a standard

deviation equal to  $1/200$  of the standard deviation of the rough surface (Figs. 7a, b). This artificial alteration of the synthetic surface mimics measurement biases obtained on natural data, for example due to electronic noise in the measurement device or due to weathering of the fault surface. We have then estimated the Hurst exponents using the six signal processing methods and compared the results with the noise-free analysis. The results confirm that adding noise to the synthetic data induces a leveling-off of the curves at small length scales (RENARD *et al.*, 2006; SAGY *et al.*, 2007) and therefore a possible underestimation of the Hurst exponent, for all six signal processing methods (Figs. 7c-h).

Despite the fact that the Gaussian white noise added is isotropic, each plot (Figs. 7c-h) indicates that the effect of noise is slightly dependent on the azimuth of the profile: The underestimation of the Hurst exponent is more pronounced along striations than perpendicularly to them. Indeed, the addition of noise in the rough signal preferentially alters the roughness at small scales, and therefore has a stronger effect on the profiles parallel to the striations because they are characterized by a smaller amplitude at large length scales compared to the profiles perpendicular to the striations.

For the RMS, MM and RMS-COR methods, the noise does affect not only the small length scales but also the large length scales. Indeed, such an effect is strongly pronounced for these three methods and, slopes of the curves in Figs. 7c-f lead to a significant underestimation of the actual value of the self-affine exponents. Notably, the polar plot of  $H$  from a surface with added noise obtained with the RMS-COR technique (see Fig. 7f) shows errors of 10% and 20% on the Hurst exponent measured in directions perpendicular and parallel to striations, respectively.

Conversely, the COR, FPS, and WPS techniques are less sensitive to the addition of noise. At large scale, the noise appears as a negligible correction, and even if the curves are affected at small scales, the estimation of the self-affine exponent is less affected.

#### 4.5. Effect of Missing Data

When considering natural fault measurements, local weathering and/or the presence of vegetation may form patches of missing data. To study their influence on estimation of fault surface properties, we generated incomplete data sets removing an increasing percentage of clusters of points from a synthetic surface that initially contained  $513 \times 513$  points (Fig. 8).

For the FPS and WPS methods, the incomplete cloud of points was interpolated across the gaps (Fig. 8b), using a linear fit. However, for the RMS-COR method, the biased data can be used without interpolation of the holes (Fig. 8c).

Typically, in our natural data sets 5% of interpolated holes is the maximum percentage of spurious points removed from the raw scanner data. The results (Figs. 8d-f) indicate that the RMS-COR, FPS and WPS analysis show an error of only 4% on the Hurst exponent estimated on a surface with 40% holes compared to a complete surface. Therefore, 5% of missing points does not significantly affect the measurement of surface properties, regardless of the technique employed.

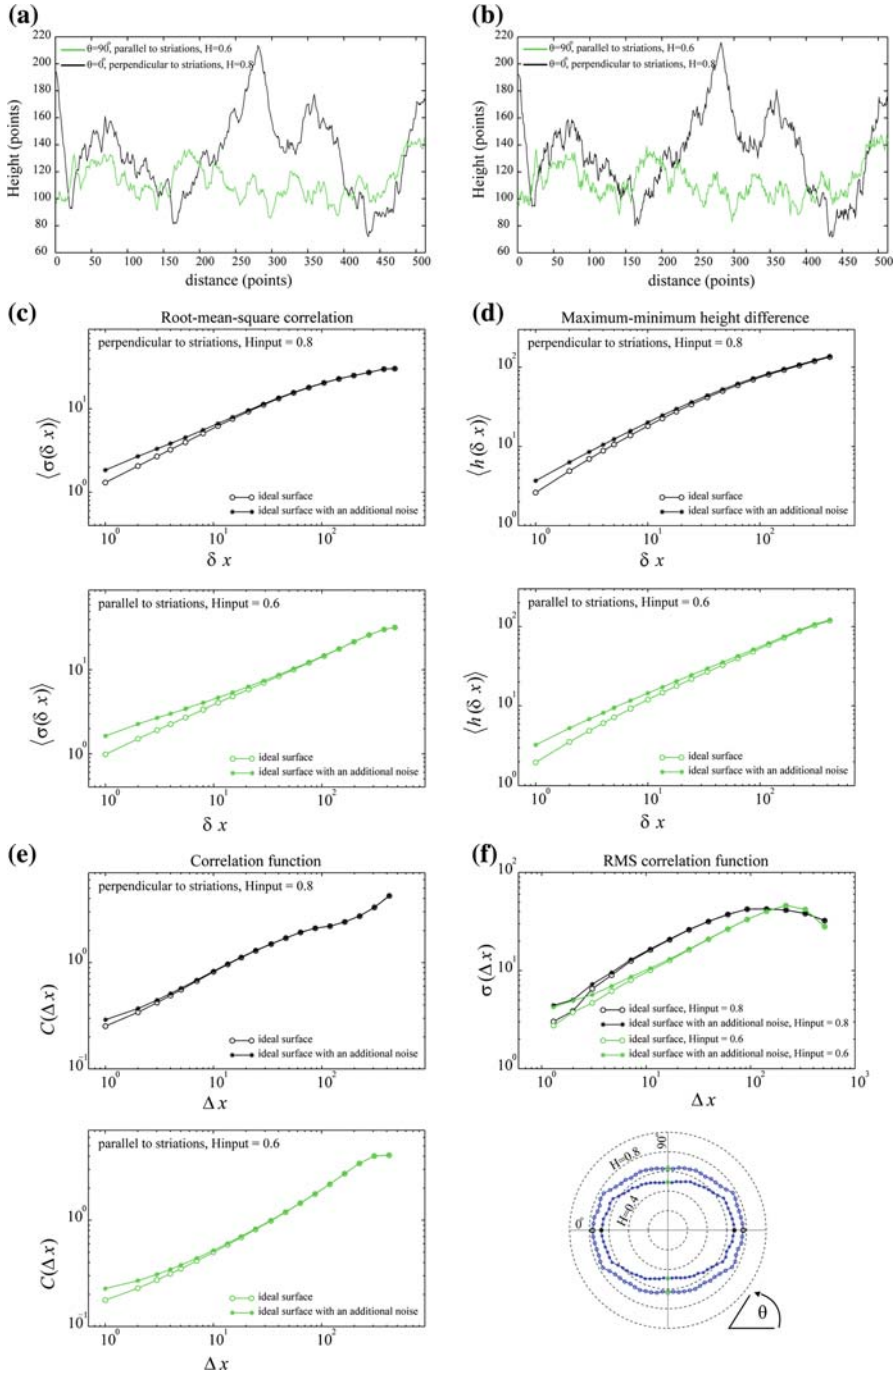


Figure 7

Influence of an additional noise on the self-affinity property of an anisotropic synthetic surface ( $513 \times 513$  points) characterized by two Hurst exponents ( $H_{//} = 0.6$  and  $H_{\perp} = 0.8$ ) in perpendicular directions. The Gaussian white noise is characterized by a standard deviation two hundred times smaller than the roughness amplitude of the synthetic surface. (a) Example of 1-D profiles extracted in two perpendicular directions of an “ideal” surface. (b) The same profiles but with an additional noise. Note that altered profiles appear more jagged or rougher at small scale compared to the noise-free profiles. Analyses of those altered surfaces are performed with the six independent self-affine methods: (c) Root-mean-squares correlation (RMS), (d) maximum-minimum height difference (MM), (e) correlation function (COR), (f) RMS correlation function (RMS-COR), (g) Fourier power spectrum (FPS), (h) wavelet power spectrum (WPS). For each method, except the RMS-COR function, two plots are represented: The upper plot shows the difference between the noise-free surface and the altered surfaces in the direction of the largest exponent and the lower one in the direction of the smallest exponent. For the RMS-COR technique, the upper plot represents the difference between the noise-free and the altered surface in both directions: perpendicular and parallel to striations. The lower subplot displays two polar plots of  $H$  obtained with the noise-free and the biased surfaces. Note that the flattening of the scaling behavior at large scales is related to a finite size effect.

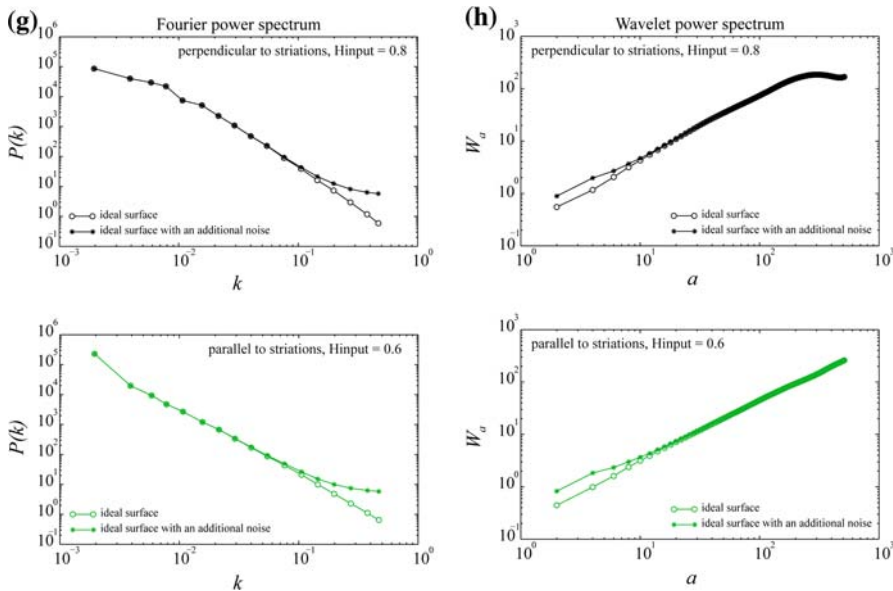


Figure 7  
contd.

### 5. Acquisition of Roughness Data on Natural Faults at Various Scales

#### 5.1. Acquisition of the Data on the Field and in the Laboratory

The roughness data of several fault samples were acquired at various scales using five different scanning devices (Table 1). At the laboratory scale, we used a home-made laser profilometer (MEHEUST, 2002), where a sample, set on a 2-axis moving table, is scanned

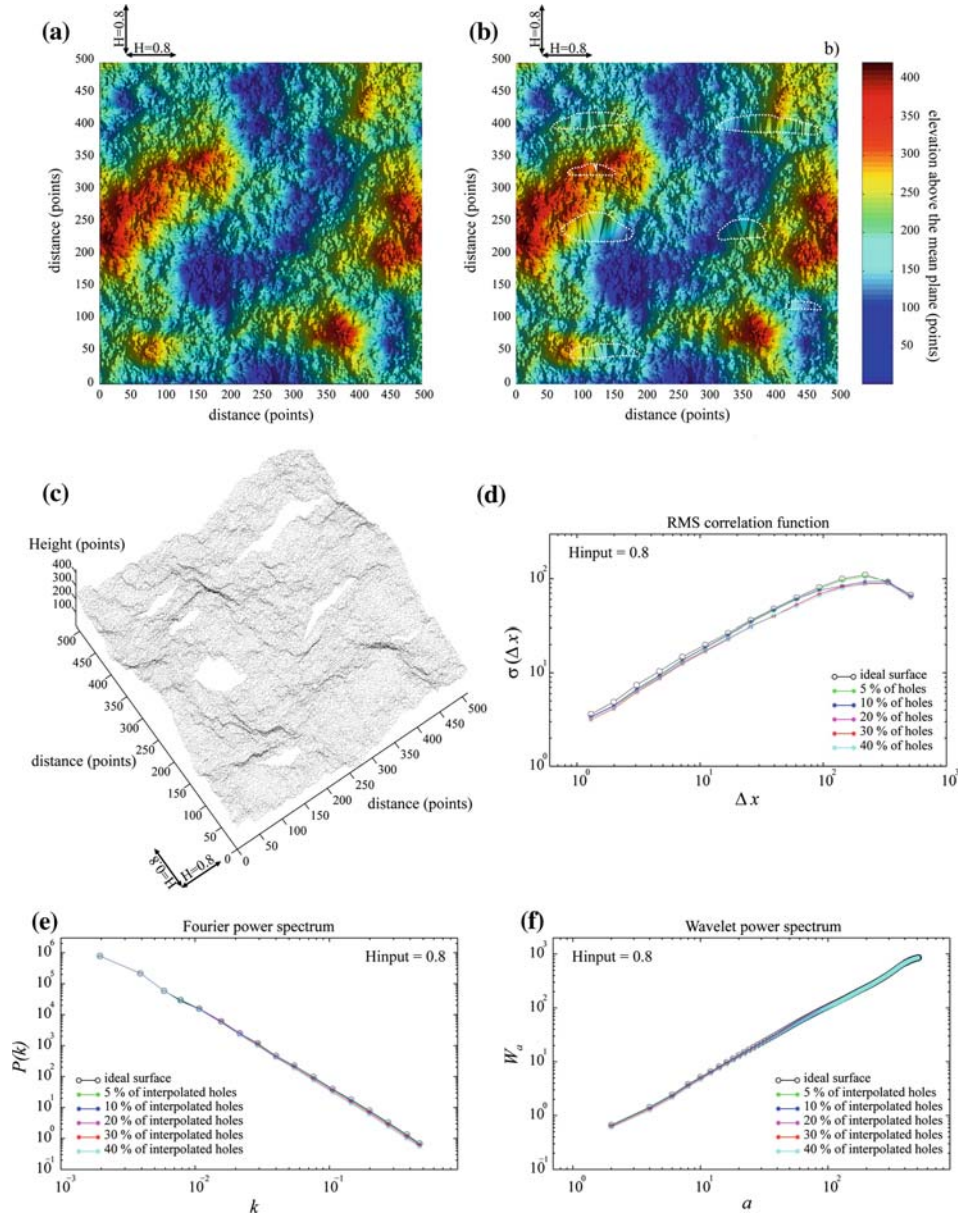


Figure 8

Influence of the interpolation of missing data on the estimation of the Hurst exponent. (a) Synthetic surface ( $513 \times 513$  points) with  $H = 0.8$ . (b) Same surface with 5% of holes (white dashed lines) that have been interpolated. (c) 3-D view of the surface in (a) with the holes. (d) RMS correlation function (RMS-COR), (e) Fourier power spectrum (FPS), (f) wavelet power spectrum (WPS). The different curves on each plot present the result of the analysis for five different percentages of missing points (5%, 10%, 20%, 30%, 40%).

Table 1

*Characteristics of the field and laboratory scanner devices*

<b>3-D scanner device</b>	S10	GS100	LMS Z420i	Illris-3D	Lab. Profilometer
<b>Company</b>	Trimble	Trimble	Riegl	Optech	Univ. Strasbourg
<b>Resolution (dx)</b>	0.5 mm	10 or 20 mm	20 mm	20 mm	20 or 24 $\mu\text{m}$
<b>Noise on the data</b>	0.9 mm	4.5 mm	10.2 mm	20 mm	<1 $\mu\text{m}$
<b>Acquisition speed</b>	70 pts/s	5000 pts/s	5000 pts/s	2500 pts/s	60 pts/s

by measuring the distance between the sample and a laser head. The horizontal scanning steps are either 20 or 24 micrometers and the vertical resolution is better than 1 micrometer.

On field outcrops we measured several surfaces with four different LIDARs, where two main technologies were used. The S10 system (Table 1) contains a laser source and two cameras; the distance between the laser head and a surface point is measured by triangulation. The maximum shooting distance is around 15 m and the resolution in the distance measurement is close to 0.5 mm. Surfaces of several square meters can be measured with this system. The main drawback of this system is that it must be operated during night time otherwise the day light may blind the cameras.

The other three LIDAR systems (Table 1) are based on the same technology and were built by three different companies: A light pulse is sent from a laser head and the time of flight to the target point is measured, allowing calculation of the distance, knowing light velocity. The whole target surface is scanned by rotating the laser head at constant angular velocity. The main advantages of this technology is that fast scanning rates can be achieved (up to 5000 points/s), the shooting distance can be as large as 1500 m and the system can be operated even under daylight. However, compared to the S10 system the measurement accuracy is lower, between 1 and 2 cm. Note also that if the laser wavelength is in the infra-red range, absorption by water present on the target surface might also alter the quality of the data.

We have used these scanning measurement devices on two faults in limestones, where outcrop fault planes were scanned at various scales. Hand samples of slip surfaces were also collected and measured with the laboratory profilometer.

### 5.2. The Magnola Normal Fault

The Magnola fault outcrop, in the Fuccino area, is part of the extensive fault system in the Central Apennines (Italy). This 15-km long normal fault shows microseismic activity and offsets limestone beds with a vertical displacement larger than 500 meters and a slight shear component witnessed by mechanical striations dipping at a 85° angle on the fault plane. This site is characterized by recent exhumation of the fault (PALUMBO *et al.*, 2004; CARCAILLET *et al.*, 2008) with less alteration by weathering than older exhumed portions of the fault. Recent earthquakes have exposed a ~10-m thick band of fresh limestone (Fig. 9a), where mechanical striations and grooves at all scales are still visible.

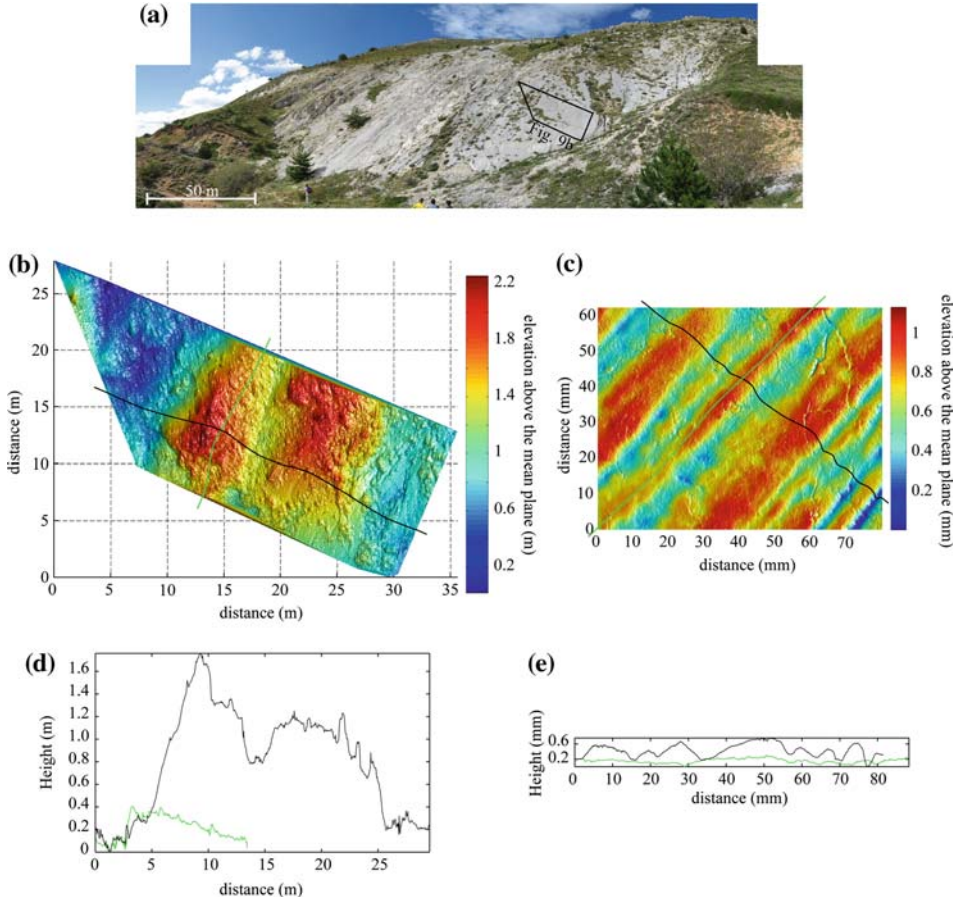


Figure 9

3-D scanner data of the Magnola fault slip surface at different scales. (a) Photograph of the fault surface showing significant weathering and covering by vegetation. The black polygon corresponds to the surface shown below. (b) Digital Elevation Model (DEM) of the surface A32 (Table 2). The LIDAR data contain 799,830 points, sampled on a roughly regular grid of  $\sim 40 \times \sim 40$  mm. The measurements were performed on a  $\sim 20 \times \sim 20$  mm grid and then averaged on a coarser grid. The resolution of the elevation is 20 mm. The fault surface shows elongated bumps (red) and depressions (blue), which have a pitch of approximately  $85^\circ$ , and indicated a main normal slip motion. The corrugation, with maximum amplitude of around 2.2 m, can be observed at all scales down to the measurement resolution. (c) DEM of hand sample M2 (Table 2) that contains  $3999 \times 3120$  points on a regular mesh of  $20 \times 20 \mu\text{m}^2$ . The surface contains grooves (blue) and ridges (red) aligned parallel to slip and with maximum amplitude of around 1.2 mm. (d) and (e) Example of 1-D profiles extracted from the DEM of surface A32 (d) and hand sample M2 (e), in directions perpendicular (black profile) and parallel (green profile) to striations. The position of extracted profiles is shown by a black line (perpendicular to striations) and a green line (parallel to striations) on each scan surface. Note the vertical exaggeration (x10) in order to highlight the roughness of parallel and normal profiles at all scales for field and laboratory data. The reduction of the amplitude of parallel profiles compared to normal profiles is an expected consequence of striations.

Table 2  
*Fault surfaces analyzed in this study*

Fault	Surface area, dx	Scanner
Vuache, SURF1	17 × 10 m, 20 mm	GS100
Vuache, SURF7	24 × 11 m, 30 mm	GS100
Vuache, SURF6	45 × 9 m, 20 mm	LMS Z420i
Vuache, SMALL	10 × 9 cm, 24 μm	Lab. Profilometer
Vuache, SURF-JPG	0.5 × 0.5 m, 1 mm	S10
Magnola, A32	35 × 15 m, 20 mm	Optech
Magnola, M2	7.2 × 4.5 cm, 20 μm	Lab. Profilometer


We have scanned several subsurfaces of the fault wall (Table 2, Fig. 9b) and collected one hand sample from the roof of the fault for laboratory measurements (Table 2, Fig. 9c). This sample, that shows mechanical striations, was excavated from below the ground surface to get a slip surface preserved from climatic weathering. The larger outcrop surfaces show evidence of erosion and some karstic water outlets provided holes for vegetation. Small bushes and grass outcrops had to be removed either directly from the fault plane, or from the LIDAR data. The result was incomplete data sets of the fault surface, with missing points in the records. Nevertheless, elongated bumps and depressions at large scales (Fig. 9b), and grooves and ridges at small scales (Fig. 9c) aligned parallel to slip can be observed. Note that 1-D profiles (Figs. 9d, e) extracted from the Digital Elevation Model (DEM) of both the field surface (Fig. 9d) and hand sample (Fig. 9e) appear to be rough at all scales.

### 5.3. The Vuache Strike-slip Fault

The Vuache fault is an active strike-slip fault system in the western part of the French Alps (THOUVENOT, 1998). The fault outcrop we analyzed lies on a short segment that connects to the main Vuache fault and is no longer active. This fault was analyzed in RENARD *et al.* (2006) and we present here new data of large- and small-scale slip surfaces (Fig. 10).

This fault has a mainly strike-slip component, witnessed by large elongated bumps and depressions associated with linear striations of smaller size observed at all scales up to the resolution of the scanners LIDAR (Fig. 10c-e). Conversely, the laboratory data show that the surface below the centimeter scale appears more polished and only smooth decimeter ridges persist (Fig. 10f). Moreover, Figure 10h shows that 1-D profiles extracted from the hand sample fault plane also appear clearly smooth at small scale. This observation is confirmed when we perform an isotropic dilation of profiles (Fig. 10h). In a different way, we observe a roughness at all scales on profiles extracted from field surfaces (Fig. 10g).

The fault offsets meter-scale beds of limestones and the fault plane was exhumed ten years ago by the activity of a quarry. As a consequence, the LIDAR measurements could be performed on fresh surfaces, where weathering was minimum and no vegetation had

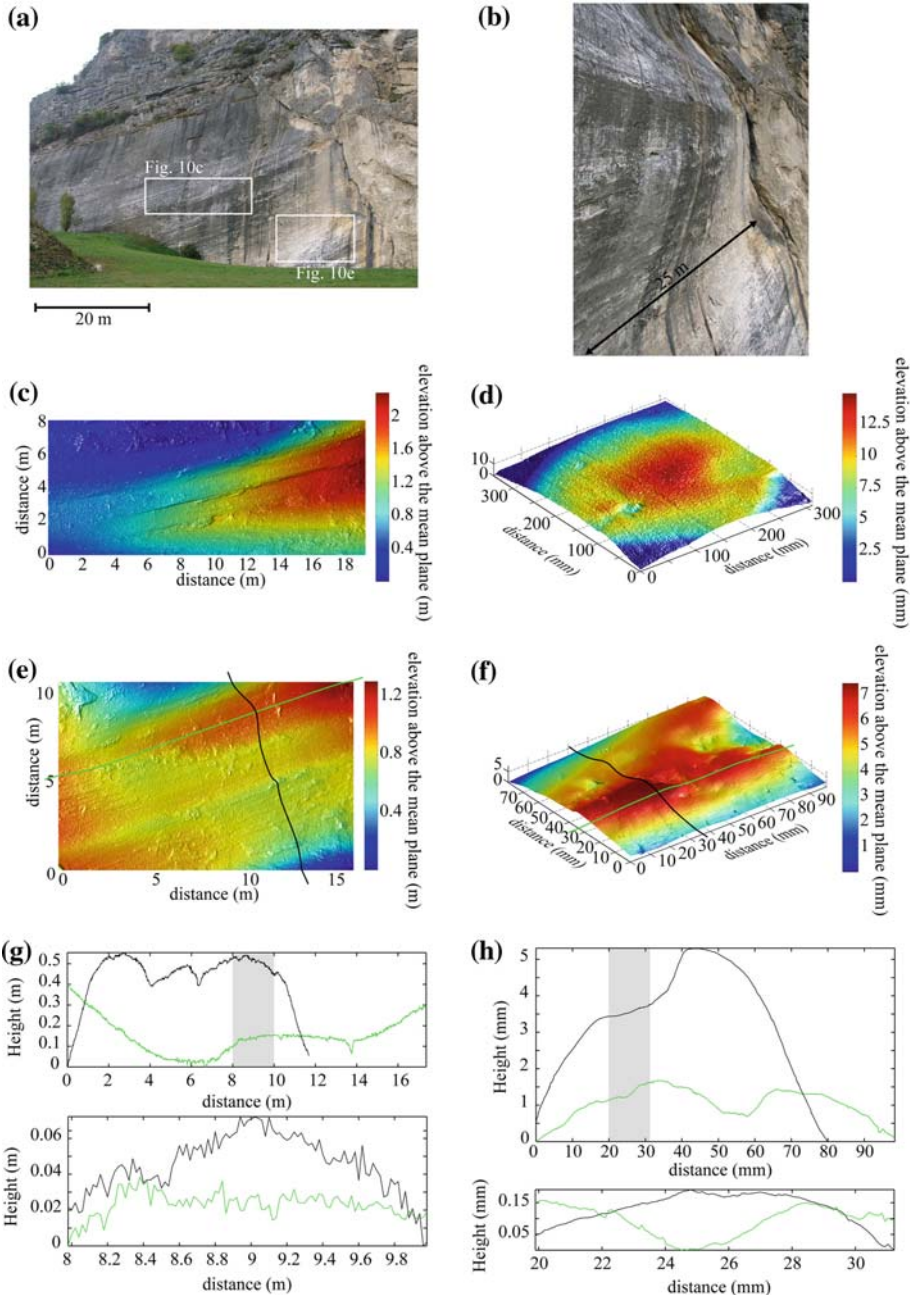

developed on the fault plane. For these surfaces, the data recovery was excellent, greater than 99.5%. We therefore obtained the topography of the surfaces without holes in the data, making the signal processing results reliable.



Figure 10

3-D data of the Vuache fault slip surface at all scales. (a) Photograph of the outcrop, where the white boxes correspond to the surfaces shown in (c) and (e). (b) Lateral photograph of the slip plane that highlights its remarkable waviness. (c-e) Fault surface topography of SURF1 and SURF6 (Table 2). Each surface contains approximately 450,000 points sampled on a constant grid of  $20 \times 20$  mm. The resolution of the elevation is 10.2 mm for (c) and 4.5 mm for (e), respectively. The surfaces show large elongated bumps (red) and depressions (blue) with maximum amplitude of around 2 m associated with linear striations of smaller size (grooves and ridges). Both geometrical patterns with a pitch of  $15\text{--}25^\circ$  indicate a strike-slip motion with a small normal component. (d) DEM of the bumpy zone SURF-JPG (Table 2) that contains 107,606 points sampled on a regular grid of  $1 \times 1$  mm. Note the vertical exaggeration. The resolution of the elevation is 0.9 mm. (f) DEM of the hand sample SMALL (Table 2) that contains  $4099 \times 3333$  points on a constant grid of  $24 \times 24 \mu\text{m}^2$ . The resolution of the elevation is less than one micrometer. The scans clearly show a smoothing of the roughness from large to small scales. Large fault surfaces measured on the field have asperities over the entire range of observed scales down to the measurement resolution. Conversely, the laboratory data indicate that the surface below the centimeter scale appears more polished and only smooth decimeter ridges persist. (g) and (h) Example of 1-D profiles extracted from the DEM of surface SURF6 (e) and hand sample SMALL (f), in directions perpendicular (black profile) and parallel (green profile) to striations. The position of extracted profiles is shown by a black line (perpendicular to striations) and a green line (parallel to striations) on each scan surface. For each surface, lower subfigures represent zooms on the portions of profiles (located by grey zones on the upper profiles) which have been detrended and dilated with identical ratios over the horizontal and the vertical directions.


## 6. Roughness Results and Interpretation

### 6.1. Magnola Fault

The roughness analysis results of the Magnola fault outcrop and hand sample are shown on Figure 11. To focus our analysis on the scaling properties of amplitude of the roughness versus wavelength, *i.e.*, the Hurst exponent, we chose to normalize the Fourier power spectrum and the averaged wavelet coefficients spectrum by their respective prefactors (Figs. 11a-d). Indeed, for a self-affine profile, the power spectrum and averaged wavelet coefficient behave respectively as:  $P(k) \propto A_k k^{-1-2H}$  and  $W_a \propto A_a a^{H+1/2}$  where prefactors  $A_k$  and  $A_a$  define the overall amplitude of the roughness. We will see later in the paper how to characterize and compare these prefactors.

On each plot (Figs. 11a-d) both LIDAR data (upper curve), acquired with the Optech scanner (Table 2), and laboratory profilometer data (lower curve) are represented, showing a scaling behavior over 5.5 orders of magnitude of length scales ( $50 \mu\text{m}$  to approximately 20 m). Each curve represents an average over a large set of parallel 1-D profiles extracted from the DEM of the fault surface shown on Figure 9. The level of noise for the field LIDAR scanner (Table 1) is estimated as the height of the flat part of the spectrum at small length scales and is indicated by the black arrows (Fig. 11). The flattening of the scaling behavior at large scales is related to a finite size effect.

The FPS and WPS techniques performed along and perpendicular to the slip direction (Figs. 11a-d) indicate that the power laws can easily be connected for the field and laboratory data, demonstrating the robustness of the scaling behavior. Moreover, our

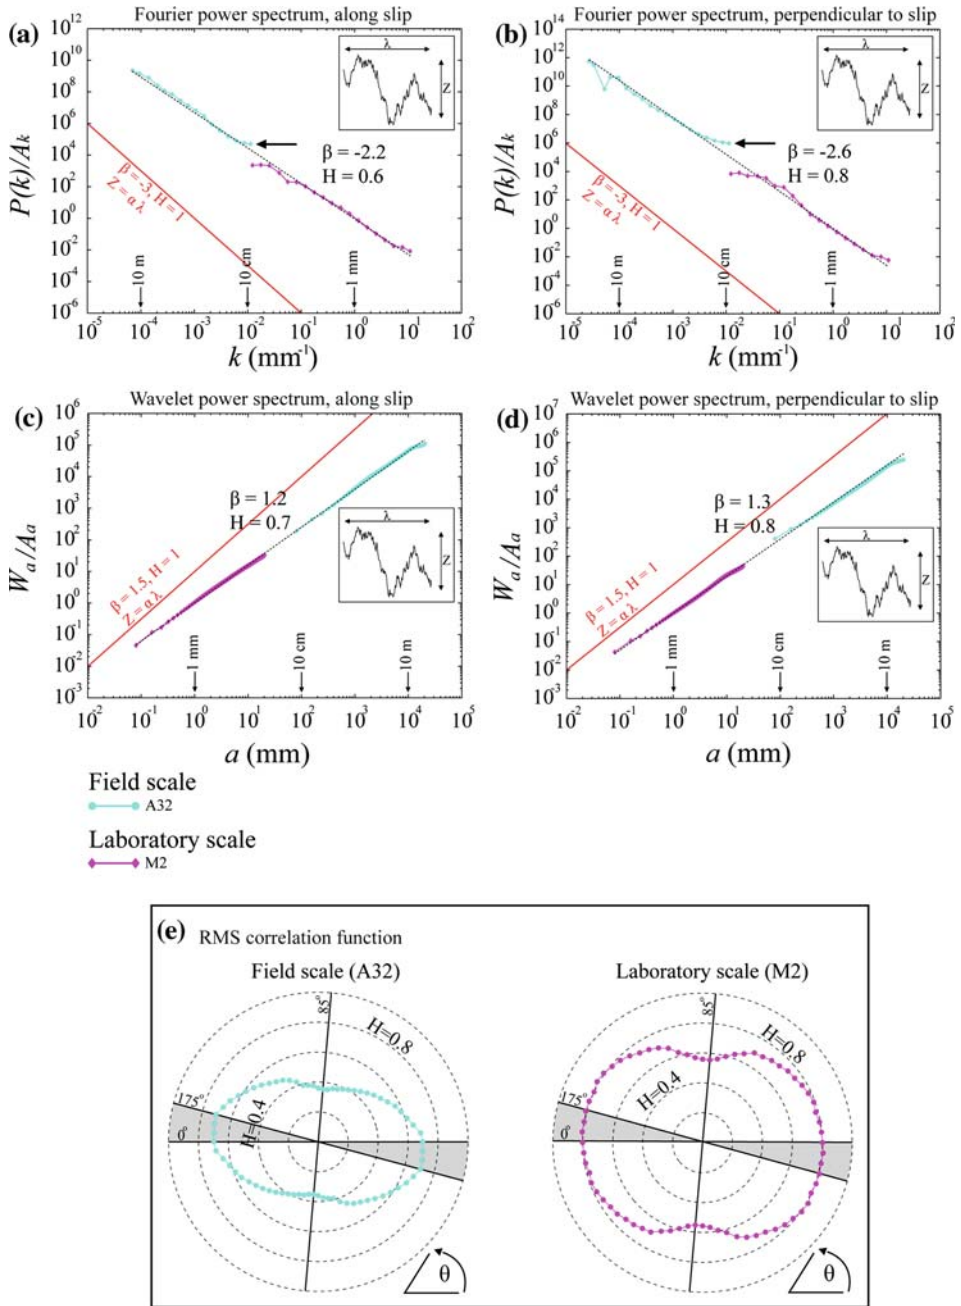

results highlight a significant directional morphological anisotropy over a wide range of scales: The profiles parallel to the slip direction are rougher than perpendicular ones (POWER *et al.*, 1988; POWER and TULLIS, 1991; LEE and BRUHN, 1996; POWER and DURHAM,



Figure 11

Roughness scaling analysis from the best preserved outcrops of the Magnola fault plane, scanned using ground-based LIDAR (surface A32, Fig. 9b), or using the laboratory profilometer (hand sample M2, Fig. 9c). (a-b) Fourier Power Spectrum (FPS) normalized, and (c-d) wavelet power spectrum (WPS) normalized along two directions, parallel and perpendicular to the direction of slip, are represented in log-log plots. Power-law fits (black dotted line) are performed for each curve and the corresponding slopes ( $\beta$ ) and roughness exponents ( $H$ ) are indicated above the spectra. The inset displays an example of the amplitude ( $Z$ ) and the wavelength ( $\lambda$ ) of a rough profile. Contours (red lines) of constant amplitude ( $Z$ ) to wavelength ( $\lambda$ ) ratio, reflecting a self-similar behavior, are provided to allow easier interpretation of the spectra. Black arrows indicate the level of noise of the LIDAR. (e) Surface anisotropy revealed by the angular variation of the Hurst exponent determined by the RMS correlation function method. The polars plot of  $H$  on the left and the right sides correspond to data of the field surface and hand sample shown on Figure 9, respectively.

1997; RENARD *et al.*, 2006; SAGY *et al.*, 2007). These two methods estimate a similar Hurst exponent perpendicular to the slip orientation ( $H_{\perp} = 0.8$ ) across the entire range of scales investigated in this study, a property similar to fresh mode I fracture surfaces (POWER *et al.*, 1987; SCHMITTBUHL *et al.*, 1995b; BOUCHAUD, 1997). However, the FPS technique indicates a greater anisotropy,  $|H_{//} - H_{\perp}| = 0.2$ , where  $H_{//}$  represents the Hurst exponent in the direction of slip, than quantified by the WPS method ( $|H_{//} - H_{\perp}| = 0.1$ ). Moreover, the WPS method overestimates the self-affine exponent along the slip direction ( $H_{//} = 0.7$ ) compared to the FPS method ( $H_{//} = 0.6$ ). An attempted explanation of these last two differences is given by our parametric study of synthetic rough surfaces: The WPS method slightly overestimates the roughness exponents when measuring couples of Hurst exponents in perpendicular directions with range of values similar to those of natural fault surface (0.6 to 0.9). Notably, the exponents accuracy with anisotropic surface of  $2049 \times 2049$  points and for two Hurst exponents in perpendicular direction of 0.8 and 0.6 is numerically estimated as  $-0.01$  and  $-0.06$  for the wavelet method, respectively (Fig. 4f). For example, an amount of  $-0.06$  should be added to the measured minimal exponent with the WPS analysis to obtain the actual one. Accordingly, on natural fault surface with two perpendicular exponents of 0.8 and 0.6 calculated by the FPS, the estimated Hurst exponent in direction parallel to slip is systematically lower than with the WPS method (Figs. 11, 13). Moreover, since the error on the output Hurst exponent is greater in direction of slip than perpendicularly to it, consequently the output anisotropy decreases, as observed on natural fault surface (Figs. 11, 13).

Our estimations obtained on the hand sample with the RMS-COR function (see Figs. 11e) show that the minimum Hurst exponent ( $H = 0.6$ ) is at  $85^{\circ}$ , in the direction of slip, and the maximum Hurst exponent ( $H = 0.8$ ) is almost in the perpendicular direction. These two extreme values of the self-affine exponent also correspond to those determined at all scales by the FPS and WPS methods. At the field scale (see Fig. 11e), the minimum ( $H = 0.4$ ) and maximum ( $H = 0.7$ ) Hurst exponents are observed in directions similar to that for the hand sample. However, the results obtained with the RMS-COR method suggest that the roughness exponent of the Magnola fault surface is smaller at the field scale compared to the laboratory scale, regardless of the azimuth. We ascribe this

variation to natural weathering (pitting) of the exposed fault surface at short wavelengths, as POWER and TULLIS (1991).

Indeed, the section of the Magnola fault surface (Fig. 9b) shows an increase of the roughness amplitude at short wavelengths created by weathering. Other sections of the Magnola fault surface, that are not presented in this study, display evidence of strong alteration at short length scales leading to a significant reduction of the Hurst exponent, regardless of azimuth. Conversely, the clean hand sample (Fig. 9c), that shows mechanical striations, should represent the actual topography of the fault surface at short length scales related to the faulting process before the action of climatic weathering. This hypothesis is supported by the fact that the fresh slip plane, scanned in laboratory, displays the same self-affine RMS-COR regimes in the directions parallel and perpendicular to slip as those estimated using the FPS and WPS methods. The increase of roughness at short wavelengths on the field surface due to the erosion appears to be similar to the effect of an additional noise tested on “ideal” synthetic surfaces (Fig. 7). In both cases, the Hurst exponent decreases in all directions. Our statistical study led on synthetic surfaces shows that the noise effect is more pronounced when using the RMS-COR technique. To summarize, the roughness scaling estimated using the RMS-COR calculated on the weathered field surface exhibits a decrease of the Hurst exponent in all directions, which is not observed with the FPS and WPS techniques.

On the polar plot of  $H$  obtained at the laboratory scale (see Fig. 11e), when departing a few degrees from the direction of slip, the Hurst exponent is close to the value of the maximum Hurst exponent measured in the direction perpendicular to mechanical striations. Such behavior is also visible on “ideal” synthetic surfaces (Fig. 5). In other words, the azimuth of the maximum Hurst exponent is not well-defined (gray shadows on Fig. 11e), while the minimum exponent corresponds to a specific orientation. Note that this property is less visible on the polar plot of the altered field fault section (see Fig. 11e) where the angular variation of  $H$  is more progressive.

To obtain a full description of the fault asperity geometry, the prefactor of the scaling function also has to be characterized. For instance, using the standard deviation  $\sigma(\delta x)$  of the height  $L(x)$ , the prefactor can be designed as:  $\sigma(\delta x) = l_r^{1-H} (\delta x)^H$  where the prefactor  $l_r$  denotes a length scale, also known as the topothesy of the fault roughness (SIMONSEN *et al.*, 2000; SCHMITTBUHL *et al.*, 2006, 2008). The topothesy corresponds physically to the length scale for which the slope of the rough profile is equal to 1:  $\sigma(l_r) = l_r$ . In other words,  $l_r$  is the theoretical length scale over which the rough profile has a mean slope of 45°. The smaller  $l_r$ , the flatter the profile appears on a macroscopic scale.

Figures 12a and b show respectively the scaling of the RMS along the slip and perpendicular to it, of the field surface topography and of the hand sample surface topography. From the best fit of these curves, we estimate the roughness exponent and the topothesy (Fig. 12c) of these two surfaces, along two perpendicular directions. For both scales, the local slope of the surface is always significantly smaller than 45 degrees for the range of scales that we explored, i.e., from 40 mm to 30 m for the field surface and from 0.04 to 90 mm for the hand sample surface, as shown on Figures 12a, b. In other

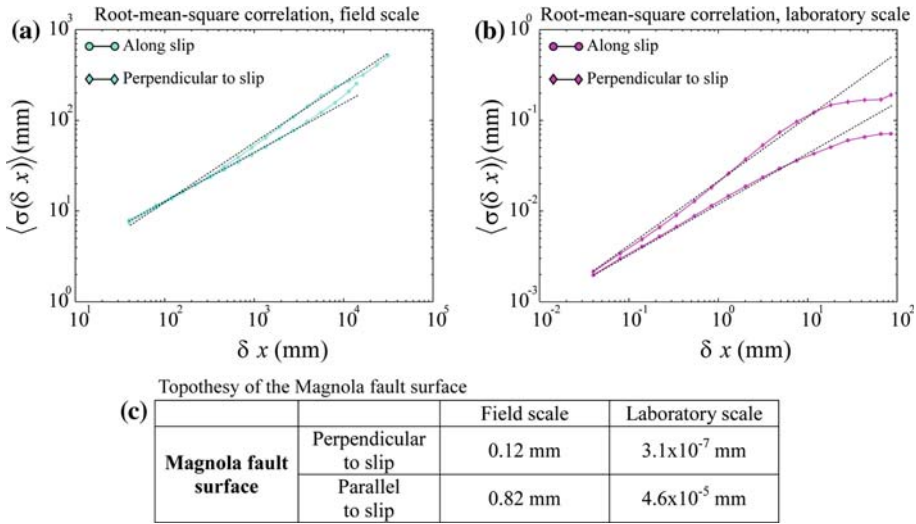


Figure 12

Scaling of the root-mean-squares correlation function (RMS) for the Magnola fault surface topography at field scale (a) and laboratory scale (b) along slip direction and perpendicular to it. The best fits (black dotted lines) of the form  $\sigma(\delta x) = l_r^{1-H} (\delta x)^H$  define the roughness exponent H and the topothesy  $l_r$ . (c).

words, the estimated prefactors are very small, indicating that these surfaces are rather smooth.

### 6.2. Vuache Fault

As explained for the Magnola fault results, the Fourier power spectrum and the averaged wavelet coefficients are normalized by their respective prefactors  $A_k$  and  $A_a$  in order to directly compare the different slopes of the scaling laws.

The FPS and WPS techniques highlight a significant directional morphological anisotropy over six orders of spatial scales (Figs. 13a-d). Profiles parallel to slip have a smaller Hurst exponent than perpendicular ones (POWER *et al.*, 1988; POWER and TULLIS, 1991; LEE and BRUHN, 1996; POWER and DURHAM, 1997; RENARD *et al.*, 2006; SAGY *et al.*, 2007). These two methods, applied to series of profiles perpendicular to the direction of slip, indicate that the power laws of individual surfaces can easily be connected across the wide range of scales investigated (Figs. 13b, d), and the value of  $H_{\perp} = 0.8$  is similar to that which was measured on the Magnola normal fault surface. However, in the slip parallel direction there is a slight change in the magnitude of  $H_{\parallel}$  located in the length scale range between 5 mm and 2 cm (Figs. 13a, c).  $H_{\parallel} = 0.75$  is larger below this length scale range than at larger length scales, where  $H_{\parallel} = 0.65$  and  $H_{\parallel} = 0.7$  for the FPS and WPS methods, respectively. The smoother aspect of the Vuache fault surface in the direction of slip compared to the perpendicular direction is an obvious and expected consequence of

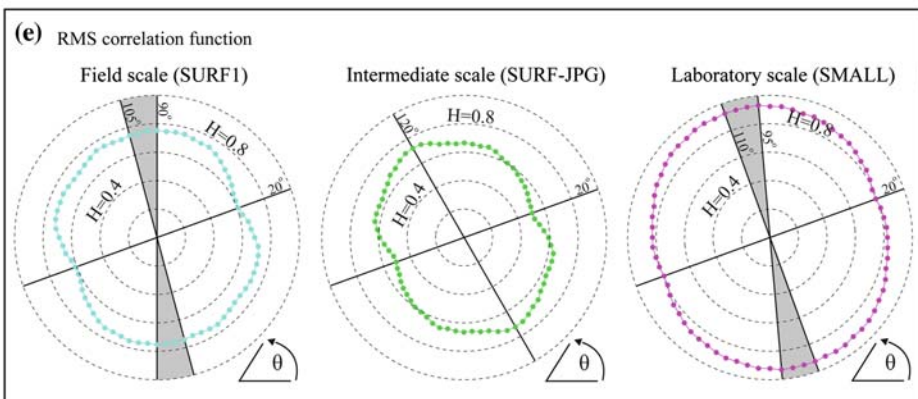
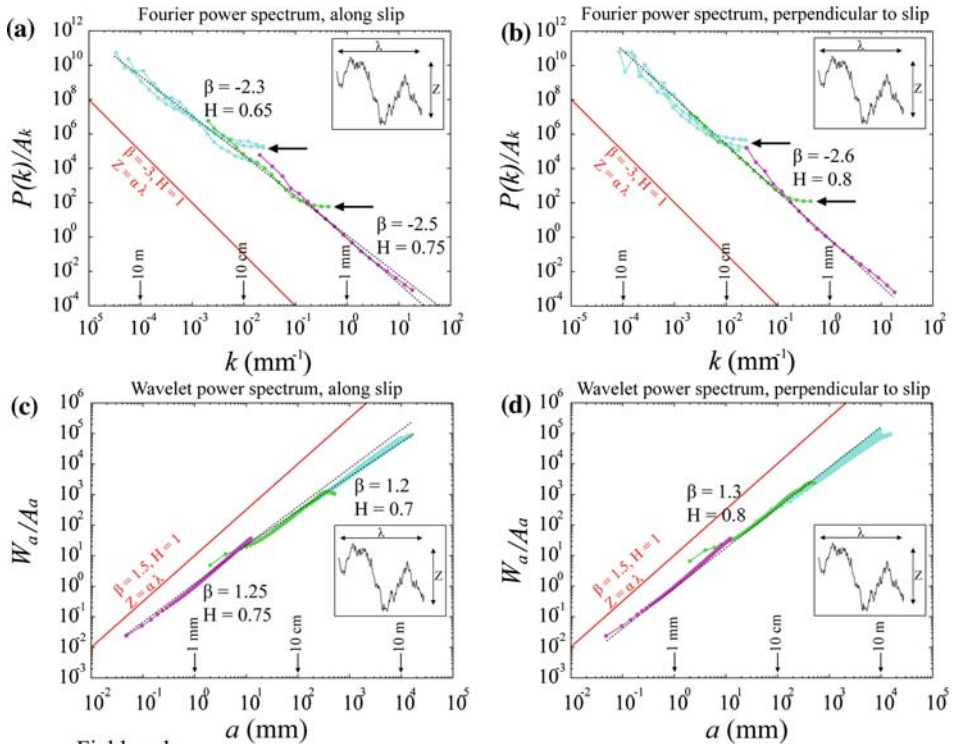




Figure 13

Roughness scaling analysis from five surfaces (Fig. 10, Table 2) of the Vuache fault, covering 6 orders of magnitude of frequencies or wavelengths (40  $\mu\text{m}$  to approximately 40 m). The data collected contain four surfaces (blue and green curves) that have been scanned using LIDAR and one hand sample (magenta curve) measured by laboratory profilometer. (a-b) Fourier power spectrum (FPS) normalized and (c-d) wavelet power spectrum (WPS) normalized along two directions, parallel and perpendicular to the direction of slip, are represented in log-log plots. Power-law fits (black dotted line) are shown for each curve and the corresponding slopes ( $\beta$ ) and roughness exponents ( $H$ ) are indicated next to the spectra. Each curve is an average over a series of parallel profiles extracted from the DEM shown on Figure 10. The level of noise for the Lidar scanners is estimated as the height of the flat part of the spectrum at small length scales and is indicated by the black arrows. The flattening of the scaling behavior at large scales is related to a finite size effect. Contours (red lines) of constant amplitude ( $Z$ ) to wavelength ( $\lambda$ ) ratio, reflecting a self similar surface, are also indicated as a guide for the eye. The inset displays an example of the amplitude ( $Z$ ) and the wavelength ( $\lambda$ ) of a rough profile. (e) Roughness anisotropy revealed by the angular variation of the Hurst exponent determined by the RMS-COR method. The polar plots of  $H$  on the left, in the center and on the right correspond to data of the field surface, the intermediate scale section and hand sample, respectively (see Fig. 10).

striations, however the smallest directional morphological anisotropy at the laboratory scale compared to the field scale is novel in this study. At the field scale, the morphology of the elongated bumps and depressions along the slip direction is different from the grooves and striations observed at the laboratory scale (Fig. 10). As the fault Vuache outcrop is quite fresh, and was preserved from the climatic erosion, we propose that this cross-over in the slope at length scale of several millimeters is significant. We interpret this cross-over length scale as a witness of different mechanical processes responsible for the creation of fault topography at different spatial scales.

Our results obtained at the field and intermediate scales with the RMS-COR function (see left and center plots on Fig. 13e) show that the minimum Hurst exponent ( $H_{//} \in [0.55-0.6]$ ) is oriented at  $20^\circ$  with respect to the horizontal, indicating the fault had a normal component besides a strike-slip component. The maximum value  $H = 0.75$  is located for an almost perpendicular direction. These two extreme values of the self-affine exponent are slightly lower when estimated using the RMS-COR function than when using the FPS or the WPS methods. This slight underestimation with the RMS-COR technique is consistent with our results on synthetic surfaces for the accuracy in this range of parameters (Fig. 4). Indeed, our parametric study with synthetic anisotropic surfaces shows that the estimation of  $H$  calculated with the RMS-COR technique slightly underestimates its actual value (Fig. 4d). At the laboratory scale (see right plot on Fig. 13e),  $H_{//} = 0.8$  and  $H_{\perp} = 0.9$  are located in orientations similar to those for the three larger surfaces measured on the field. However, the polar plot of  $H$  calculated using the RMS-COR function suggests an increase of the scaling exponents in all directions, while the estimation using the FPS or WPS techniques underlined that the exponent increased only along the slip direction. In addition, the two exponents  $H_{//}$  and  $H_{\perp}$  for the hand sample are overestimated when calculated with the RMS-COR method compared to the FPS and WPS techniques. The latter observation cannot be explained by the results of our parametric study on synthetic surfaces. As a consequence of the extremely smooth

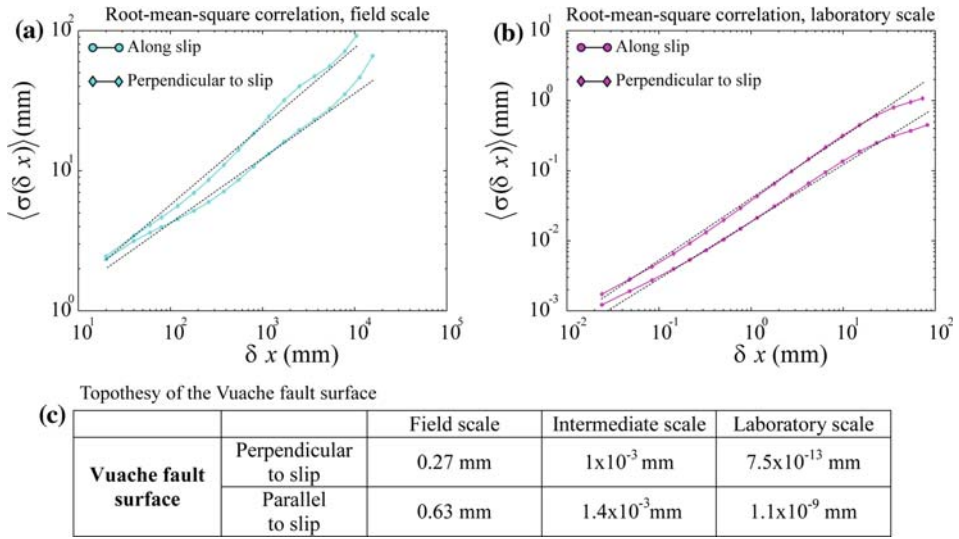


Figure 14

Scaling of the root-mean-square correlation function (RMS) for the Vuache fault surface topography at field scale (a) and laboratory scale (b) along slip direction and perpendicular to it. The best fit of the form  $\sigma(\delta x) = l_r^{1-H} (\delta x)^H$  defines the roughness exponent  $H$  and the topothesy  $l_r$  (c).

aspect of the hand sample at small scales (Figs. 10f, h), the RMS-COR method could lose its robustness. However, a new reliable result is that the directional morphological anisotropy calculated by the RMS-COR function significantly decreases at the laboratory scale, as observed with the FPS and WPS techniques.

As observed on the polar plot of  $H$  calculated on the Magnola fault surface (Fig. 11e), the azimuth of the maximum Hurst exponent is less constrained (gray shadows on Fig. 13e) than the single specific orientation of the striations. Remarkably, despite the weak anisotropy of the hand sample topography, the slip direction is always significant, demonstrating the accuracy and reliability of the RMS-COR method.

We also estimated the topothesy of the Vuache fault surface (Fig. 14) when computing the standard deviation  $\sigma(\delta x)$  of the height  $L(x)$ . As for the Magnola fault data, the prefactor  $l_r$  always lies outside the range of scales that we explored, *i.e.*, from 20 mm to 15 m for the field surface and from 0.024 mm to 80 mm for the laboratory surface, as shown on Figures 14a-b. In other words, the topothesy of the measured fault planes represents a theoretical value that is very small (see Fig. 14c) and that confirms that fault surfaces are rather smooth. Moreover, it is of interest to note that at the field scale, the topothesy value of the Vuache fault surface (Fig. 14c) is similar to that of the Magnola fault (Fig. 12c). However, at laboratory scale this quantity is significantly lower for the Vuache hand sample compared to that of the Magnola. This characteristic highlights the smoothing of the Vuache fault plane at small scale as already observed on the DEM (Fig. 10f), the 1-D profiles of the Vuache hand sample (Fig. 10 h), and the roughness scaling analysis (Fig. 13).

## 7. Discussion and Conclusion

The six statistical tools used in this study have different responses to the effect of two kinds of biases, the intrinsic errors of the methods (Figs. 3, 4, 5, 6) and the artifacts inherent in data acquisition (Figs. 7, 8). Using a parametric approach, where we varied the size of the surface and its anisotropy, we selected the three most reliable and accurate methods (RMS-COR, FPS, WPS) for roughness analysis of natural fault topography (Figs. 11, 13). The FPS and WPS techniques allow obtaining a robust description of the fault asperity geometry in the direction of slip and perpendicular to it (Figs. 11a-d, 13a-d). Additionally, the RMS-COR technique is robust to characterize the angular variation of  $H$  (Figs. 11e, 13e). The Hurst exponent estimation at various scales for the natural slip surfaces displays the same trends and provides a consistent and robust characterization of their scaling regimes. We emphasize that the slight variations in the results given by each of these methods fall within the range of error estimated by our parametric study (see Section 4).

One of the most robust results of our scaling analysis is that the FPS and the WPS methods estimate a same Hurst exponent equal to 0.8 in the direction perpendicular to slip, over approximately 6 orders of magnitude of length scales for two different fault surfaces (Figs. 11b,d and 13b,d). However, in the slip direction two different scaling behaviors are highlighted: The Magnola fault surface manifests an identical scaling regime at large and small scales (Figs. 11a, c). Conversely, the scaling property of the Vuache fault roughness exhibits a cross-over in the slope at length scale of several millimeters (Figs. 13a, c). In other words, the scaling property of this fault surfaces is similar at large scales but changes at small scales. The statistical analyses (Fig. 13) and the scan of the Vuache fault surface (Fig. 10) clearly show a smoothing of the roughness below a length scale of several millimeters.

The scaling regime of 0.8 measured in the direction perpendicular to slip is a classical result already observed for tensile cracks (POWER *et al.*, 1987; SCHMITTBUHL *et al.*, 1995b; BOUCHAUD, 1997), indicating that the topography of the fault surface in the direction perpendicular to slip has not registered the effect of shear. Along slip, the general interpretation is that mechanical wear processes, such as frictional ploughing, cause striations that reduce the amplitude of the large scale roughness (POWER *et al.*, 1987, 1988; POWER and TULLIS, 1991; POWER and DURHAM, 1997; SAGY *et al.*, 2007) and accordingly the Hurst exponent. Nevertheless, our scaling analysis seems to indicate different mechanical processes responsible for the creation of fault topography at different spatial scales.

Prior comparative studies of natural fault roughness based on 1-D profilometry (POWER and TULLIS, 1991; LEE and BRUHN, 1996) suggest a change in scaling properties between large and short length scales. However, due to technical limitations, their measures were not sufficiently accurate to decipher if this variation was related either to small-scale surface weathering of the fault scarp or to the faulting process itself.

From laboratory experiments CHEN and SPETZLER (1993) suggest that the break in slope at length scales of several millimeters is caused by a change in the dominant mode of deformation from small-scale intergranular cracking to intragranular cracking at a

larger scale. We think this interpretation does not apply to the Magnola and Vuache faults because the grain scale of these limestones is very small ( $< 0.1$  mm), well below the observed cross-over length scale.

Recently, SAGY *et al.* (2007) observed that faults with large cumulated slip display surfaces with elongate, quasi elliptical bumps at field scale and are polished at small scales. Conversely, faults with a small cumulative slip are rough on all scales. SAGY and BRODSKY (2009) proposed that the waviness of the large slip fault surface reflects variations of thickness of the cohesive layer under the slip surface formed as boudinage structures (JOHNSON and FLETCHER, 1994; SMITH, 1977; TWISS and MOORES, 1992; GOSCOMBE *et al.*, 2004). Therefore, they evoke two different deformation mechanisms between large and small scales: abrasion caused by frictional sliding at the origin of the smoothing at small scales, and “boudinage” creating elongated bumps and depression at large scales.

From our study of natural fault roughness, we observe large elongated bumps and depressions in slip direction on two different fault planes (Figs. 9b, 10a-e). There is no evidence that the small segment, polished at small scale (Figs. 10f, h), that connects to the main Vuache fault has accumulated more slip than the Magnola fault surface that is rough at all scales (Figs. 9b, c). Therefore, we propose that large elongated bumps and depressions of several meters in length with maximum amplitude of around 2 m may reflect the processes of lateral growth and branching that link together several fault surfaces, during all the stages of the evolution of the fault zone, as suggested by LEE and BRUHN (1996) and LIBICKI and BEN-ZION (2005).

At small scales, two different kinds of scaling regime are observed on the two fault surfaces, (Figs. 11, 13), both being linked to mechanical wear process. Frictional sliding is expressed through ploughing of small asperities and is responsible for the small-scale abrasional striations on the Magnola fault surface (Fig. 9c). This mechanism is also responsible for the polishing of the Vuache fault surface below the centimeter scale (Figs. 10f, h). One should keep in mind that only one hand sample was measured for each surface and therefore it is possible that differences of the scaling behavior between the two fault planes reflect spatial heterogeneity of core fault at small scales. Notably, on the Vuache fault, although the surface appears polished at the laboratory scale on the whole surface, zones with striations due to ploughing elements could be present. A more extensive study of fault roughness in several different faults should therefore produce more information on the mechanisms at work during faulting.

#### *Acknowledgments*

We would like to thank Jim Dieterich and an anonymous reviewer for helpful comments. We acknowledge Benoit Dubacq for technical help on *Matlab* and Sebastien Boutareaud for encouragement and constructive comments that enhanced this work. Anne-Marie Boullier, Jean-Pierre Gratier, Mai-Linh Doan, Emily Brodsky are decidedly thanked for their fruitful discussions concerning the Vuache fault surface. We also

acknowledge a research grant from the program TUNES at the University Joseph Fourier – Grenoble I.

### Appendix A

```
function RoughSurf = Synthetic2DFault(N,H1,H2)

% This Matlab(c) function creates a self-affine 2D surface,
% with a directional anisotropy (courtesy of Hermine Bierme,
% Univ. Paris V, France), when H1 is different from H2.
% Input parameters:
% N = size of the surface: (2^(N+1)+1) x (2^(N+1)+1)
% Typically N must be between 8 and 11 when running on a
% desktop computer.
% H1, H2: Hurst exponents in two perpendicular directions
% must be positive, smaller than 1.
% Output result:
% RoughSurf: rough surface of size (2^(N+1)+1) x (2^(N+1)+1),
% with two perpendicular directions of self-affinity
% characterized by Hurst exponents H1 and H2, l1 = 1/H1 and
% l2 = 1/H2 represent the eigen values of the anisotropy
% diagonal matrix
l1 = 1/H1;
l2 = 1/H2;
X = (-2*2^N:2*2^N)/(2^(N+1));
X(2^N+1) = 1/2^N;
Y = (-2*2^N:2*2^N)/(2^(N+1));
Y(2^N+1) = 1/2^N;
XX = X(ones(1,2*2^N+1),:);
YY = Y(ones(1,2*2^N+1),:);
clear X Y

% rho is the pseudo-norm associated to the eigen values l1 and
% l2
% rho(x,y)=(abs(x)^(2/l1) + abs(y)^(2/l2) )^(1/2)
rho = sqrt(abs(XX).^ (2/l1)+abs(YY).^ (2/l2));
clear XX YY

%phi is the spectral density of the field built from rho
phi = rho.^(1 + (l1+l2)/2);
clear rho

% W = Fourier transform of the anisotropic Gaussian field
Z = randn(2*2^N+1,2*2^N+1);
W = fftshift(fft2(Z))./phi;
clear Z
T = real(ifft2(ifftshift(W)));
RoughSurf = T-T(2^N+1,2^N+1);

% Plot the 2D rough surface
imagesc(RoughSurf);
axis equal
axis tight
```

## REFERENCES

- AMITRANO, D. and SCHMITTBUHL, J. (2002), *Fracture roughness and gouge distribution of a granite shear band*, J. Geophys. Res. *107*(B12), 2375, doi: 10.1029/2002JB001761.
- AKI, K. (1984), *Asperities, barriers, characteristic earthquakes and strong motion prediction*, J. Geophys. Res. *89*, 5867–5872.
- BARABASI, A.-L. and STANLEY, H. E., *Fractal Concepts in Surface Growth* (Cambridge University Press, 1995).
- BIERME, H., MEESCHAERT, M. M., and SCHEFFLER, H.-P. (2007), *Operator scaling stable random fields*, Stoch. Proc. Appl. *117*, 312–332.
- BEN-ZION, Y. and SAMMIS, C.G. (2003), *Characterization of fault zones*, Pure Appl. Geophys. *160*, 677–715, doi: 10.1007/PL00012554.
- BOUCHAUD, E. (1997), *Scaling properties of cracks*, J. Phys. Condens. Matter *9*, 4319–4344.
- BROWN, S. R. and SCHOLZ, C. H. (1985), *Broad bandwidth study of the topography of natural rock surfaces*, J. Geophys. Res. *90*, 2575–2582.
- CAMPILLO, M., FAVREAU, P., IONESCU, I. R., and VOISIN, C. (2001), *On the effective friction law of an heterogeneous fault*, J. Geophys. Res. *106*, 307–322.
- CARCILLET, J., MANIGHETTI, I., CHAUVEL, C., SCHLAGENHAUF, A., and NICOLE, J. M. (2008), *Identifying past earthquakes on an active normal fault (Magnola, Italy) from the chemical analysis of its exhumed carbonate fault plane*, Earth Planet. Sci. Lett. *271*, 145–158, doi:10.1016/j.epsl.2008.03.059.
- CHEN, G. and SPETZLER, H. A. (1993), *Topographic characteristics of laboratory-induced shear fractures*, Pure Appl. Geophys. *140*, 123–135.
- CLAUSEL, M. and VEDEL, B. (2008), *Explicit constructions of operator scaling stable random Gaussian fields*, preprint to Adv. Appl. Prob.
- GOSCOMBE, B. D., PASSCHIER, C., and HANDA, M. (2004), *Boudinage classification: end-member Boudin types and modified boudin structures*, J. Struct. Geol. *26*, 739–763.
- JOHNSON, A. M. and FLETCHER, R. C., *Folding of Viscous Layers: Mechanical Analysis and Interpretation of Structures in Deformed Rock* (Columbia University Press, 1994).
- LAY, T., KANAMORI, H., and RUFF, (1982), *The asperity model and the nature of large subduction zone earthquakes*, Earth. Predict. Res. *1*, 3–71.
- LEE, J.-J. and BRUHN, R. (1996), *Structural anisotropy of normal fault surfaces*, J. Struct. Geol. *18*, 1043–1059.
- LIBICKI, E. and BEN-ZION, Y. (2005), *Stochastic Branching Models of Fault Surfaces and Estimated Fractal Dimensions*, Pure Appl. Geophys. *162*, 1077–1111, doi: 10.1007/s00024-004-2662-7.
- MANDELBROT, B. B. (1985), *Self-affine fractals and fractal dimension*, Phys. Scripta. *32*, 257–260.
- MANDELBROT, B. B., *Fractals in Physics* (Elsevier, Amsterdam, 1986).
- MARSAN, D. (2006), *Can coseismic stress variability suppress seismicity shadows? Insights from a rate-and-state friction model*, J. Geophys. Res. *111*, B06305, doi:10.1029/2005JB004060.
- MEAKIN, P., *Fractals: Scaling and Growth far From Equilibrium* (Cambridge Univ. Press, New York, 1998).
- MÉHEUST, Y. (2002), *Ecoulements dans les fractures ouvertes*, Ph. D. Thesis, Univ. Paris VI and Ecole Normale Supérieure, Paris.
- OKUBO, P. G. and AKI, K. (1987), *Fractal geometry in the San Andreas fault system*, J. Geophys. Res. *92*, 345–355.
- PALUMBO, L., BENEDETTI, L., BOURLES, D., CINQUE, A., and FINKEL, R. (2004), *Slip history of the Magnola fault (Apennines, Central Italy) from <sup>36</sup>Cl surface exposure dating: Evidence for strong earthquakes over the Holocene*, Earth Planet. Sci. Lett. *225*, 163–176.
- PARSONS, T. (2008), *Persistent earthquake clusters and gaps from slip on irregular faults*, Nature Geosci. *1*, 59–63, doi:10.1038/ngeo.2007.36.
- PEYRAT, S., OLSEN, K. B., and MADARIAGA, R. (2004), *Which dynamic rupture parameters can be estimated from strong ground motion and geodetic data?*, Pure Appl. Geophys. *161*, 2155–2169, doi: 10.1007/s00024-004-2555-9.
- POWER, W. L., TULLIS, T. E., and WEEKS, J. D. (1988), *Roughness and wear during brittle faulting*, J. Geophys. Res. *93*, 15,268–15,278.
- POWER, W. L., TULLIS, T. E., BROWN, S. R., BOITNOTT, G. N., and SCHOLZ, C. H. (1987), *Roughness of natural fault surfaces*, Geophys. Res. Lett. *14*, 29–32.

- POWER, W. L. and TULLIS, T. E. (1991), *Euclidean and fractal models for the description of rock surface roughness*, J. Geophys. Res. 96, 415–424.
- POWER, W. L. and DURHAM, W. B. (1997), *Topography of natural and artificial fractures in granitic rocks: Implications for studies of rock friction and fluid migration*, Int. J. Rock Mech. Min. Sci. 34, 979–989.
- RENARD, F., VOISIN, C., MARSAN, D., and SCHMITTBUHL, J. (2006), *High resolution 3D laser scanner measurements of a strike-slip fault quantify its morphological anisotropy at all scales*, Geophys. Res. Lett. 33, L04305, doi: 10.1029/2005GL025038.
- RUBIN, A. M., GILLARD, D., and GOT, J. -L. (1999), *Streaks of microearthquakes along creeping faults*, Nature 400, 635–641.
- SAGY, A., BRODSKY, E. E., and AXEN, G. J. (2007), *Evolution of fault-surface roughness with slip*, Geology 35, 283–286.
- SAGY, A. and BRODSKY, E. E. (2009), *Geometric and rheological asperities in an exposed fault zone*, J. Geophys. Res. 114(B02301), doi:10.1029/2008JB005701.
- SCHAFF, D. P., BOKELMANN, G. H. R., BEROZA, G. C., WALDHAUSER, F., and ELLSWORTH, W. L. (2002), *High-resolution image of Calaveras fault seismicity*, J. Geophys. Res. 107(B9), 2186, doi:10.1029/2001JB000633.
- SCHMITTBUHL, J., CHAMBON, G., HANSEN, A., and BOUCHON, M. (2006), *Are stress distributions along faults the signature of asperity squeeze?*, Geophys. Res. Lett. 33, L13307, doi:10.1029/2006GL025952.
- SCHMITTBUHL, J., GENTIER, S., and ROUX, R. (1993), *Field measurements of the roughness of fault surfaces*, Geophys. Res. Lett. 20, 639–641.
- SCHMITTBUHL, J., VILOTTE, J., and ROUX, S. (1995a), *Reliability of self-affine measurements*, Phys. Rev. E. 51, 131–147.
- SCHMITTBUHL, J., SCHMITT, F., and SCHOLZ, C. (1995b), *Scaling invariance of crack surfaces*, J. Geophys. Res. 100, 5953–5973.
- SCHMITTBUHL, J., STEYER, A., JOUNIAUX, L., and TOUSSAINT, R. (2008), *Fracture morphology and viscous transport*, Int. J. Rock. Mech. Min. Sci. 45, 422–430.
- SCHOLZ, C. H., *The Mechanics of Earthquake and Faulting* (Cambridge Univ. Press, New York, 2002).
- SIMONSEN, I., HANSEN, A., and NES, O.M. (1998), *Using wavelet transforms for Hurst exponent determination*, Phys. Rev. E. 58, 2779–2787.
- SIMONSEN, I., VANDEMBROUCQ, D., and ROUX, S. (2000), *Wave scattering from self-affine surfaces*, Phys. Rev. E. 61, 5914–7.
- SMITH, R. B. (1977), *Formation of folds, boudinage, and mullions in non-Newtonian materials*, Geol. Soc. Amer. Bull. 88, 312–320.
- STEIN, M. L. (2002), *Fast and exact simulation of fractional Brownian surfaces*, J. Comput. Graph. Statist. 11, 587–599.
- THOUVENOT, F. (1998), *The ML 5.3 Epagny (French Alps) earthquake of 1996 July 15: A long-awaited event on the Vuache Fault*, Geophys. J. Int. 135, 876–892.
- TWISS, R. J. and MOORES, E. M., *Structural Geology* (W. H. Freeman, New York, 1992).
- VOISIN, C., CAMPILLO, M., IONESCU, I., HASSANI, R., and NGUYEN, Q.-L. (2002a), *Process and signature of initiation on a finite fault system: A spectral approach*, Geophys. J. Int. 148, 120–131.
- VOISIN, C., IONESCU, I., and CAMPILLO, M. (2002b), *Crack growth resistance and dynamic rupture arrest under slip dependent friction*, Phys. Earth Planet. Inter. 131, 279–294.
- VOSS, R.F., *Scaling Phenomena in Disorder Systems* (Plenum, New York, 1985).

(Received September 30, 2008, accepted March 17, 2009)

Published Online First: June 29, 2009

---

To access this journal online:  
[www.birkhauser.ch/pageoph](http://www.birkhauser.ch/pageoph)

---